

GENERAL PAVEMENT MARKING NOTES:

1. PRIOR TO START OF CONSTRUCTION, ALL EXISTING PAVEMENT MARKINGS WITHIN THE AREA OF CONSTRUCTION SHALL BE INVENTORIED AND DOCUMENTED JOINTLY BY THE CITY INSPECTOR AND THE CONTRACTOR. THIS DOCUMENT WILL BE JOINTLY SIGNED BY BOTH PARTIES REFLECTING ALL EXISTING PAVEMENT MARKINGS AND LANE CONFIGURATIONS WILL BE DUPLICATED AGAIN. THIS REVIEW CAN BE DONE IN CONJUNCTION WITH SIGN INVENTORY. THE CONTRACTOR IS HELD ACCOUNTABLE FOR EXISTING AND TEMPORARY CONSTRUCTION PAVEMENT MARKINGS THROUGHOUT THE PROJECT AND AT THE PROJECT'S COMPLETION.
2. ALL PAVEMENT MARKINGS SHALL CONFORM TO CITY OF HOUSTON STANDARDS AND SPECIFICATIONS AND GENERAL GUIDELINES OF THE TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES (TMUTCD).
3. THE PERMANENT PAVEMENT MARKINGS MAY BE MODIFIED AS DIRECTED BY THE CITY TRAFFIC ENGINEER.
4. THE DESIGN SPEED FOR THE ROAD IS: \_\_\_\_\_. THE POSTED SPEED LIMIT IS: \_\_\_\_\_.
5. ALL LANE DIMENSIONS ARE FROM CENTER OF LANE LINE, CENTER OF DOUBLE LANE LINE, FACE OF CURB, OR EDGE OF PAVEMENT UNLESS OTHERWISE NOTED.
6. THE PAVEMENT MARKING DRAWINGS ARE SCHEMATIC ONLY. THE CONTRACTOR SHALL FOLLOW ALL DIMENSIONS, DETAILS, AND STANDARDS WHEN INSTALLING PAVEMENT MARKINGS AND SYMBOLS.
7. THE FINAL LONGITUDINAL STRIPINGS SHALL BE 60 MIL (0.060") THICK HOT-SPRAYED THERMOPLASTIC PLACED OVER THE TEMPORARY STRIPING WITHIN 14 TO 30 CALENDAR DAYS AFTER COMPLETION OF THE FINAL PAVEMENT SURFACE, OR AS DIRECTED BY THE CITY TRAFFIC ENGINEER. ALL OTHER PAVEMENT MARKINGS SHALL BE APPLIED AT THE SAME TIME. TEMPORARY STRIPING SHALL BE WATER BASED PAINT.
8. ALL FINAL TRANSVERSE MARKINGS SHALL BE 90 MIL (0.090") HOT-SPRAYED THERMOPLASTIC. ALL PAVEMENT ARROWS AND LEGENDS SHALL ALSO BE 90 MIL (0.090") HOT-SPRAYED THERMOPLASTIC. PREFORMED THERMOPLASTIC APPLICATIONS MAY BE USED IF ONLY APPROVED BY THE CITY TRAFFIC ENGINEER.
9. THE CONTRACTOR SHALL BE RESPONSIBLE FOR THE LAYOUT AND INSTALLATION OF PAVEMENT MARKINGS OF FINAL SURFACE COURSE FOLLOWING CONTROL POINTS THAT HAVE BEEN SET NO MORE THAN 50 FEET APART ALONG THE LINES TO BE IMPLEMENTED. IN TANGENT SECTIONS OF A ROAD WHERE THE PAVEMENT MARKING PATTERN DOES NOT CHANGE, CONTROL POINTS CAN BE SET AT 200 FEET SPACING. THE LAYOUT AND INSPECTION OF ALL PAVEMENT MARKINGS SHALL BE APPROVED BY CITY OF HOUSTON REPRESENTATIVE PRIOR TO THE APPLICATION OF MATERIALS.
10. IT IS THE CONTRACTOR'S RESPONSIBILITY TO ENSURE THAT THE FINAL SURFACE COURSE IS PLACED SO THAT THE STRIPING IS OFFSET NO MORE THAN ONE FOOT CLEAR OF THE CONSTRUCTION JOINT, UNLESS OTHERWISE DIRECTED BY THE CITY TRAFFIC ENGINEER.
11. ALL RAISED PAVEMENT MARKERS (RPMS) SHALL BE INSTALLED SO THAT THE REFLECTIVE FACE OF EACH MARKER IS FACING THE DIRECTION OF TRAFFIC AND IS PERPENDICULAR TO THE DIRECTION OF TRAFFIC FLOW. TYPE C PAVEMENT MARKERS SHALL BE INSTALLED SO THAT THE CLEAR FACE OF EACH MARKER IS FACING THE APPROACHING TRAFFIC FLOW AND PERPENDICULAR TO THE DIRECTION OF TRAFFIC FLOW.
12. ALL REMOVAL OF EXISTING PAVEMENT MARKINGS SHALL BE ACCOMPLISHED IN ACCORDANCE TO CITY OF HOUSTON STANDARD SPECIFICATION 02762. APPLYING OVER EXISTING PAVEMENT MARKINGS DOES NOT CONSTITUTE AS APPROVED OBLITERATION METHOD.
13. THE ENGINEER OF RECORD SHALL BE REQUIRED TO PRODUCE AS-BUILT OF PAVEMENT MARKING PLANS WITHIN 30 DAYS AFTER COMPLETION OF PAVEMENT MARKING IMPLEMENTATION.
14. BLUE RPMS MAY BE PLACED ADJACENT TO FIRE HYDRANTS WITH THE APPROVAL OF THE CITY TRAFFIC ENGINEER.
15. FOR ALL CONSTRUCTION, ALL PAVEMENT MARKINGS AND SIGNING SHALL BE INSTALLED AND SHALL BE PAID BY THE PROJECT OWNER/DEVELOPER.
16. FINAL INSPECTION AND ACCEPTANCE OF PAVEMENT MARKINGS SHALL BE PERFORMED BY TRANSPORTATION & DRAINAGE OPERATION REPRESENTATIVE (713-803-3054).


Description and Application of Pavement Marking Lines

Line Series	Color	Description	Width Inches	Typical Applications
WB	White	Broken (10' stripe w/ 30' gap)	4"	- Lane lines between travel lanes in the same direction where changing of lanes is permitted.
WS	White	Solid	4"	- Edge lines to delineate the right edge of the roadway.
			6"	- Left edge of bicycle lane and lane lines between travel lanes in the same direction where changing of lanes is discouraged.
			12"	- Perpendicular crosswalk lines.
			24"	- Stop bars at intersections (signalized and unsignalized).
			12", 24"	- Hatching at high visibility crosswalks.
WG	White	Guide (2' stripe w/6' gap)	6"	- Guide lines through intersections. - Taper lines for turn lanes. - Guide lines for bicycle lanes.
YS	Yellow	Solid	4"	- Edge lines to delineate the left edge of a divided roadway, a one-way road, or ramp.
			12", 24"	- Diagonal hatching used in gores between opposing direction of travel lanes.
YDS	Yellow	Double Solid	4" - (4") - 4" (gap)	- Centerline that separates opposing travel lanes and delineation of median islands.
YDB	Yellow	Double Broken	4" - (4") - 4" (gap)	- Defines the edges of center reversible lanes that are used as TWLTLs during intermittent periods.
YB	Yellow	Broken (10' stripe w/ 30' gap)	4"	- Separates travel lanes in opposite directions where passing is permitted in both directions of travel.
YB (BIKE)	Yellow	Broken (3' stripe w/ 9' gap)	4"	- Separates bicycle travel lanes in opposite directions where passing is permitted in both directions of travel.
YSB	Yellow	Solid & Broken Broken (10' stripe w/ 30' gap)	4" - (4") - 4" (gap)	- Separates travel lanes in opposite directions where passing is permitted in one direction and prohibited in the opposite direction. - Used for edge of two-way left-turn lanes (TWLTL).
BICYCLE GREEN	Green	Solid Colored Pavement	Varies	- Ped/Bike crossing - Vehicle / Bike/ Conflict Area
YIELD LINE	White	Triangle	16" x 24"	- Mid-Block crossing.

Description and Application of Reflective Raised Pavement Markers (RPM)

RRPM Types	Color	COH Spec. Sec. 02764 Equivalent	Description
C	Clear	Type I-C	- Approach face that reflects white light, and the other side does not reflect.
R	Clear & Red	Type II-C-R	- Approach face that reflects white light, and the other side reflects red light.
A	Amber & Amber	Type II-A-A	- Approach face and the other side both reflect amber light.

Line Style Designation : YSB4 - A40/A40

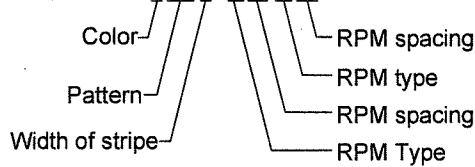

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

GENERAL NOTES  
AND LEGENDS





(NOT TO SCALE)

*[Signature]*  
CITY TRAFFIC ENGINEER  
*[Signature]*  
CITY ENGINEER

*[Signature]*  
DIRECTOR OF  
HOUSTON PUBLIC WORKS

EFF DATE: JUL-01-2018

DWG NO: 01510-01

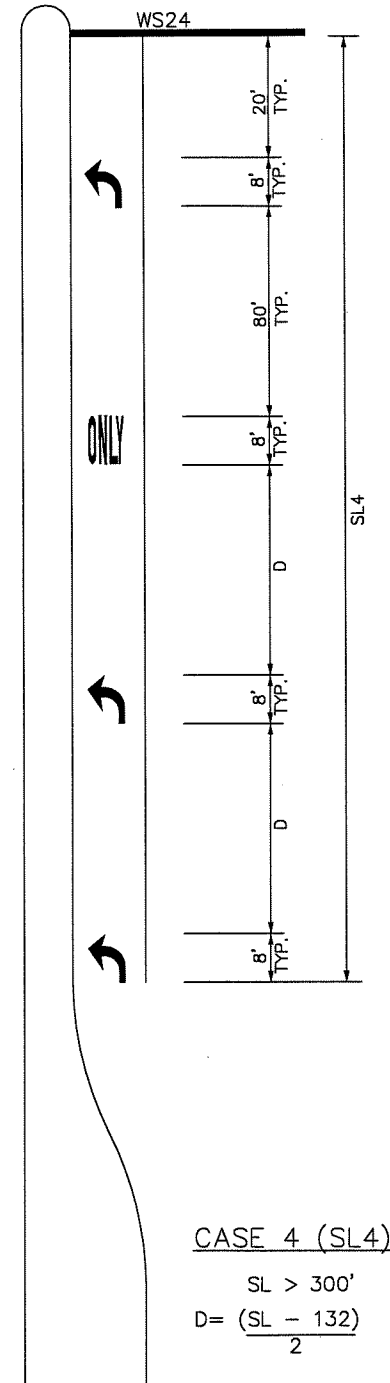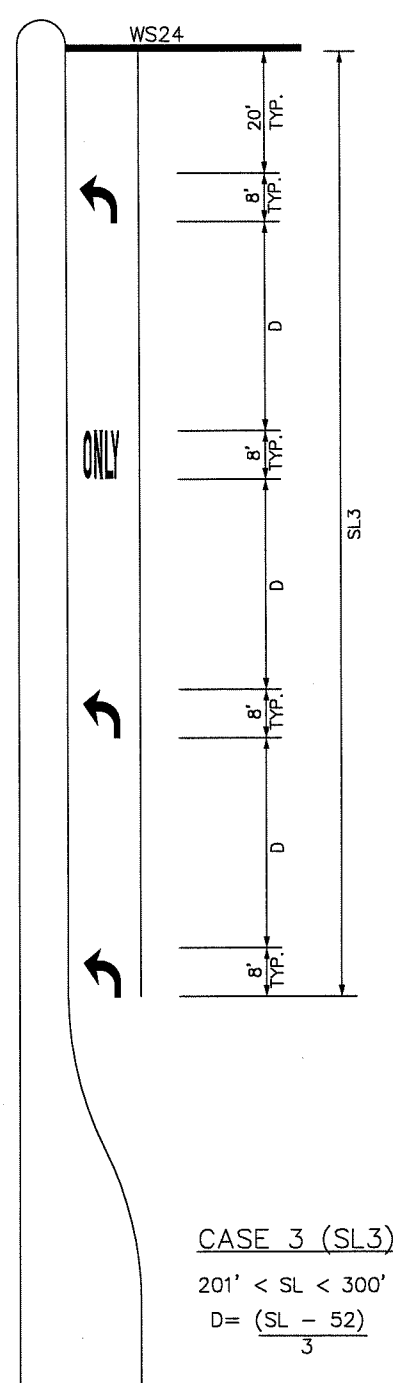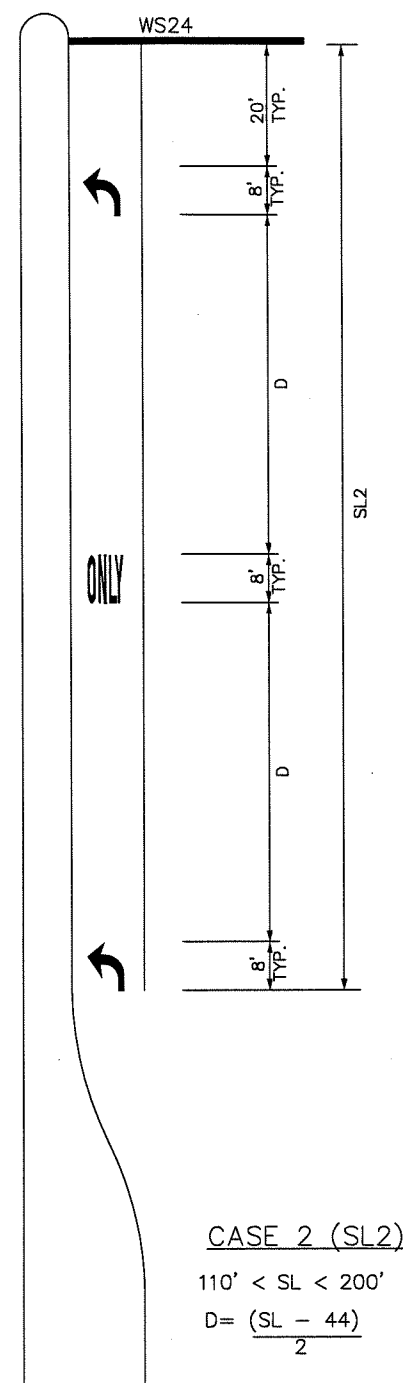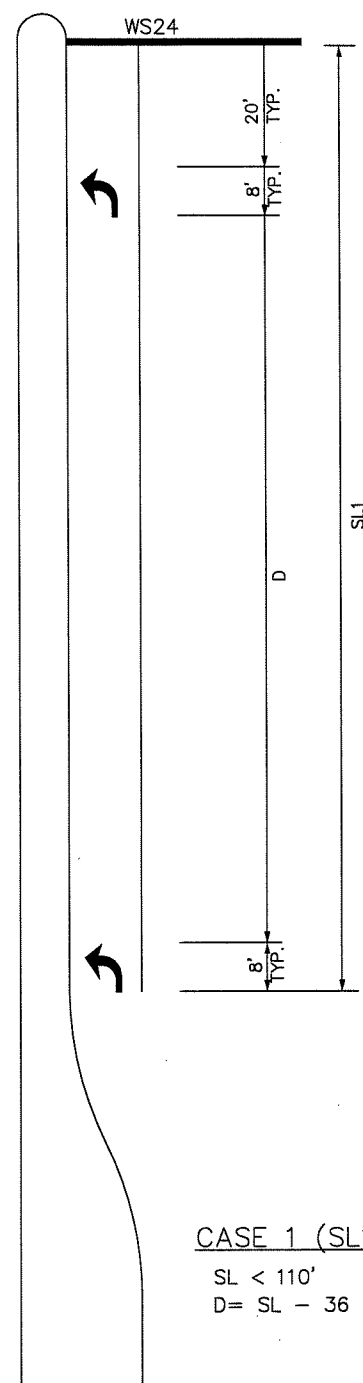

KEY (FOR TURN LANES ONLY):

SL - STORAGE LENGTH (FEET)

D - DISTANCE BETWEEN ARROWS AND/OR WORDS (FEET)


GENERAL NOTES:

1. ALL CASES AND DETAILS ALSO APPLY TO RIGHT-TURN LANES.
2. FOR DUAL-TURN LANES, DIMENSIONS SHALL BE THE SAME FOR EACH LANE.
3. SL DIMENSION IS FROM BACK OF STOP LINE TO END OF TURN LANE.  
NOTE: DO NOT INCLUDE TAPER LENGTH.
4. PAVEMENT ARROWS AND "ONLY" LEGEND MARKINGS ARE TYPICALLY USED AT ALL SIGNALIZED INTERSECTIONS AND AT ALL UNSIGNALIZED INTERSECTIONS THAT HAVE TURN LANES.
5. MINIMUM SL= 100'. SL MAY BE LESS THAN 100 FEET ONLY BY APPROVAL OF THE CITY TRAFFIC ENGINEER.

CITY OF HOUSTON HOUSTON PUBLIC WORKS	
LEFT/RIGHT-TURN "ONLY" AND ARROW SPACING (NOT TO SCALE)	
 CITY TRAFFIC ENGINEER  CITY ENGINEER	 DIRECTOR OF HOUSTON PUBLIC WORKS
EFF DATE: JUL-01-2018	DWG NO: 01510-02




CITY OF HOUSTON HOUSTON PUBLIC WORKS	
STANDARD PAVEMENT MARKING — (WORDS)	
(NOT TO SCALE)	
 CITY TRAFFIC ENGINEER  CITY ENGINEER	 DIRECTOR OF HOUSTON PUBLIC WORKS
EFF DATE: JUL-01-2018	DWG NO: 01510-03

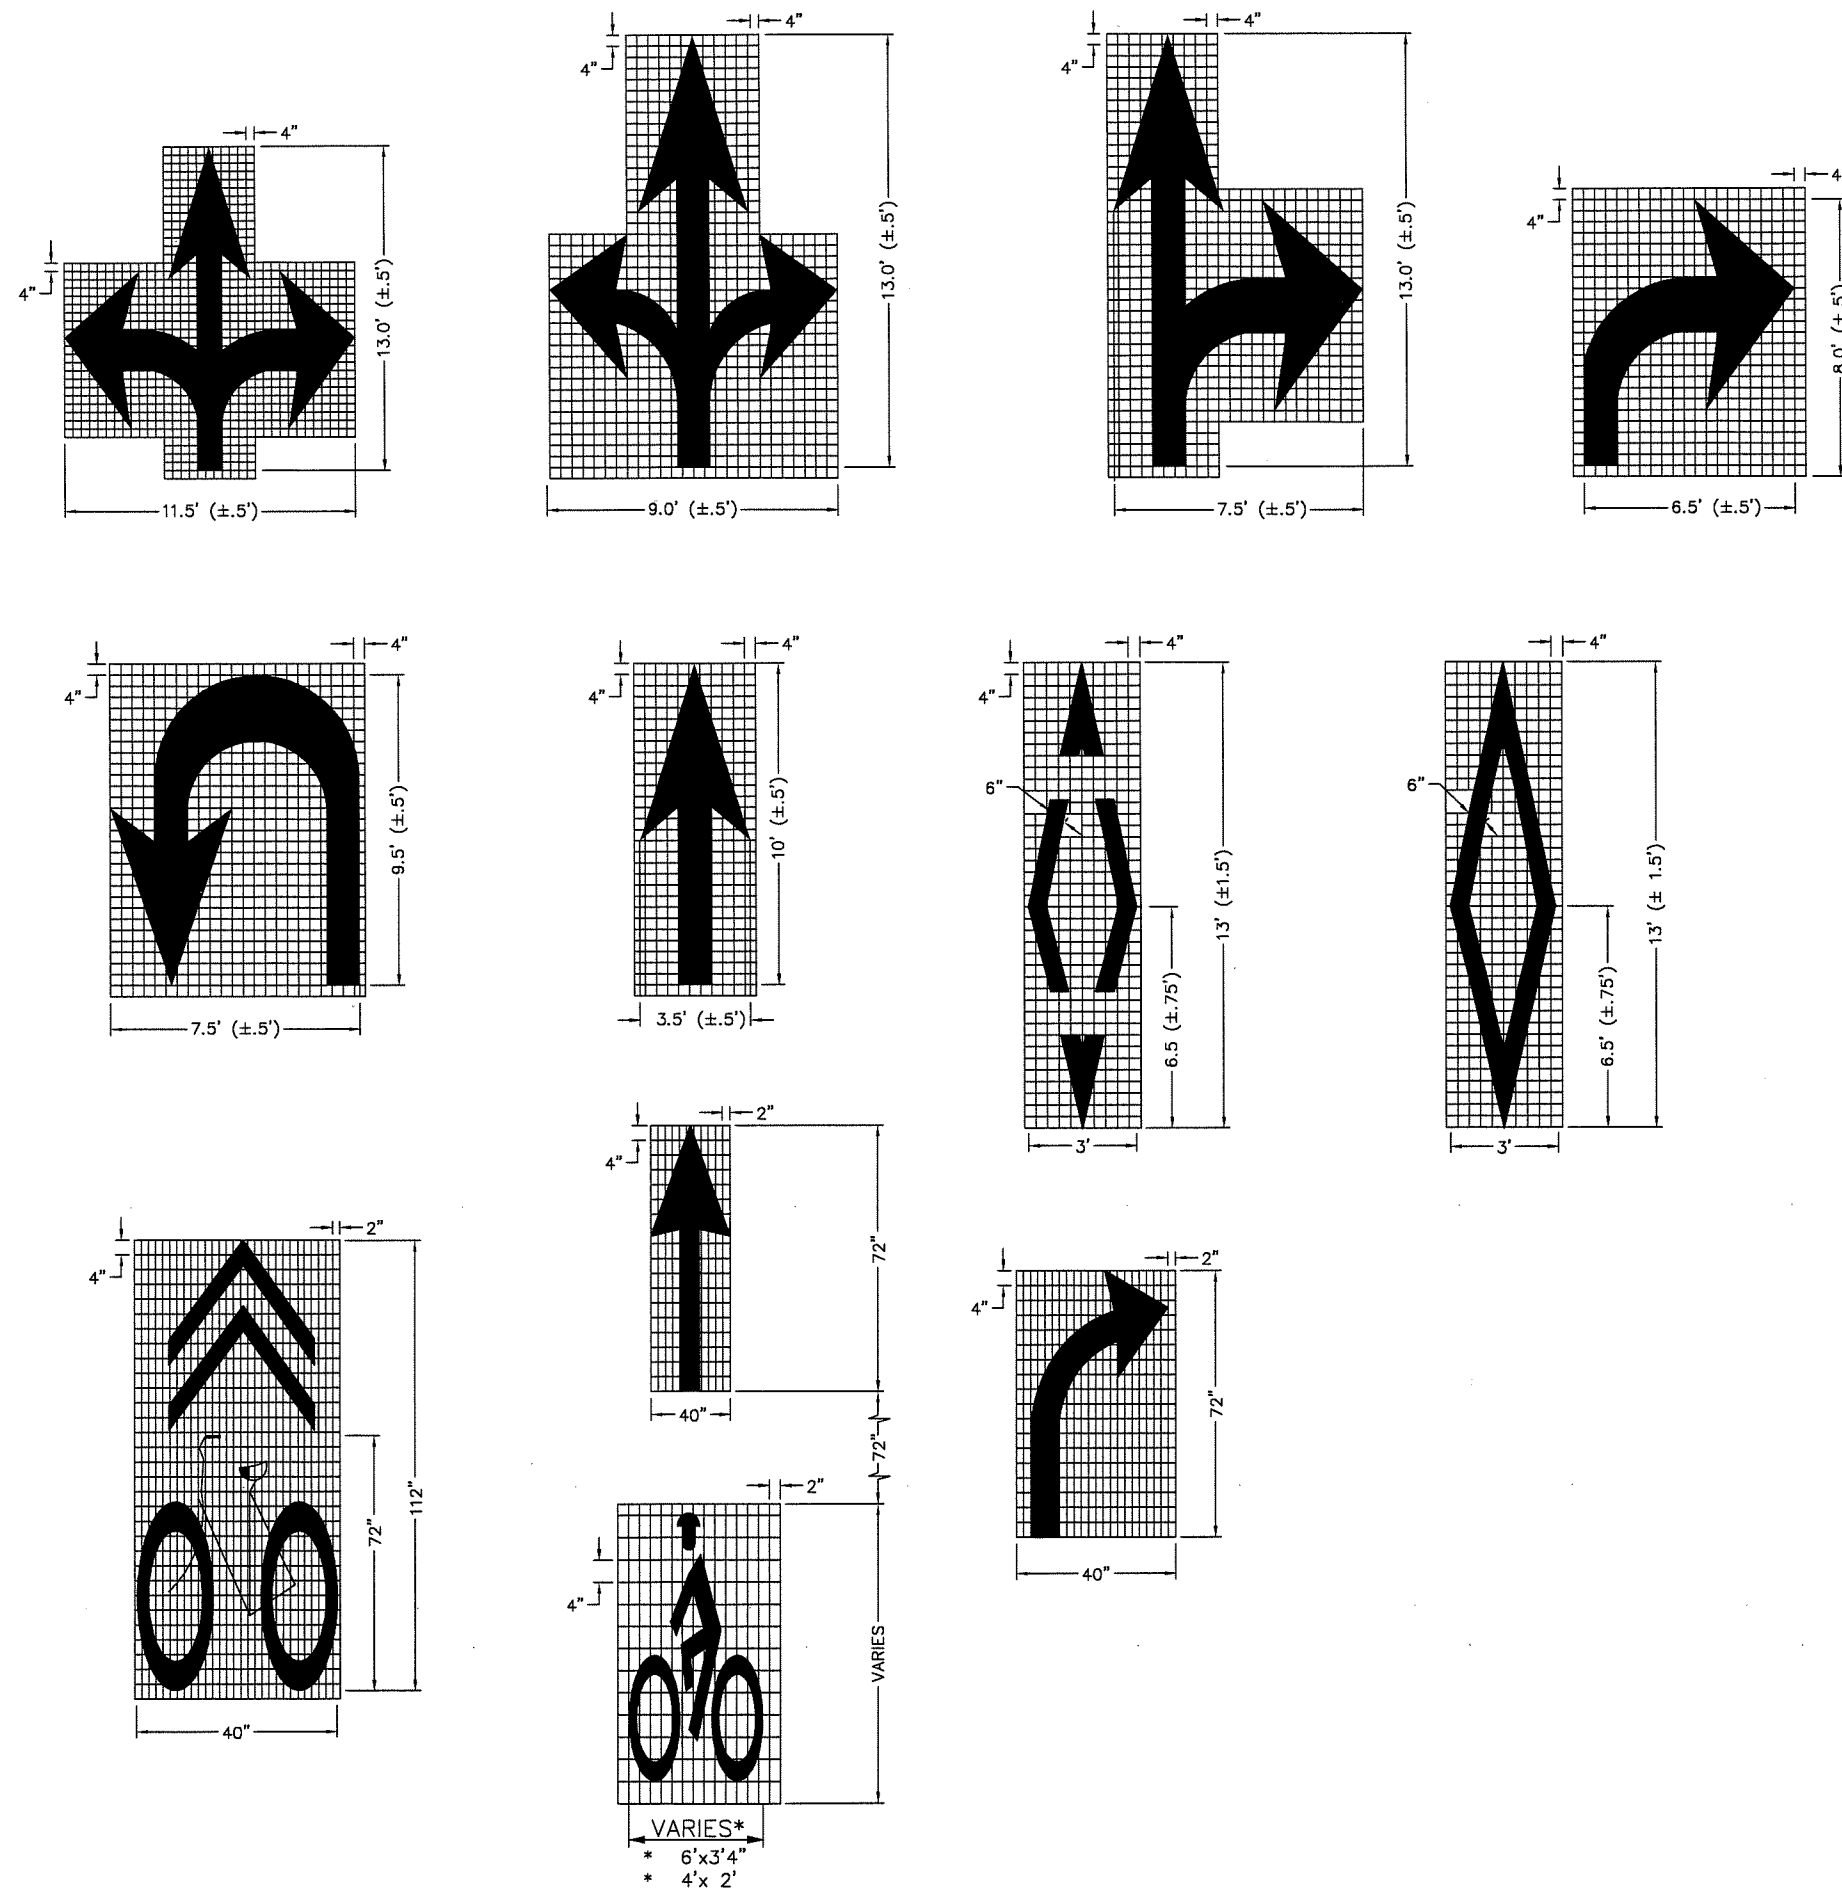

- NOTES FOR PAVEMENT MARKINGS "SYMBOLS" AND "ARROWS":
1. MINIMUM 8 FOOT WHITE MARKINGS SHALL BE USED, UNLESS OTHERWISE NOTED. IF MESSAGE CONSISTS OF MORE THAN ONE WORD, IT SHOULD BE PLACED WITH FIRST WORD NEAREST THE DRIVER.
  2. THESE DETAILS ARE STANDARD SIZE FOR NORMAL INSTALLATION; SIZES MAY BE REDUCED APPROXIMATELY ONE-THIRD DEPENDING ON CONDITIONS. SPECIAL PERMISSION NEEDED BY CITY TRAFFIC ENGINEER FOR REDUCTION BELOW ONE-THIRD OF STANDARD SIZES.
  3. THE LONGITUDINAL SPACE BETWEEN MARKINGS SHOULD BE 30 FEET, OR AS INDICATED ON THE PLANS.
  4. MARKINGS CONSIDERED APPROPRIATE FOR USE WHEN WARRANTED INCLUDE THE FOLLOWING:
    - A. REGULATORY
      - STOP
      - RIGHT (LEFT) TURN ONLY, SYMBOL ARROWS.
    - B. WARNING
      - STOP AHEAD
      - SIGNAL AHEAD
      - SCHOOL
      - SCHOOL X-ING
      - PED X-ING
      - R X R (SEE SHEET 01510-08 DETAILS)
  5. UNCONTROLLED USE OF PAVEMENT MARKINGS CAN RESULT IN DRIVER CONFUSION. WORD AND SYMBOL MARKINGS SHOULD BE NO MORE THAN THREE LINES.
  6. THE WORD "STOP" SHALL NOT BE USED ON THE PAVEMENT UNLESS ACCOMPANIED BY A STOP LINE AND STOP SIGN. THE WORD "STOP" SHALL NOT BE PLACED ON THE PAVEMENT IN ADVANCE TO A STOP LINE, UNLESS EVERY VEHICLE IS REQUIRED TO STOP AT ALL TIMES (ALL-WAY STOP).
  7. PAVEMENT MARKINGS SHOULD GENERALLY BE NO MORE THAN ONE LANE IN WIDTH, WITH SCHOOL MESSAGES BEING THE EXCEPTION. FOR DETAILS OF SCHOOL AND SCHOOL CROSSING PAVEMENT MARKINGS, REFER TO PART VII OF THE "TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL DEVICES".
  8. SPACING BETWEEN STANDARD SIZE LETTERS SHOULD BE 4 INCHES (MIN). THE WIDTH OF NON-STANDARD SIZE LETTERS MAY VARY DEPENDING ON THE WIDTH OF THE TRAVEL LANES. APPROVAL BY CITY TRAFFIC ENGINEER. SPECIAL PERMISSION NEEDED FOR NON-STANDARD SIZE "LETTER" AND/OR "ARROWS".
  9. LANE-USE ARROW MARKINGS MAY BE USED TO CONVEY EITHER GUIDANCE OR MANDATORY MESSAGES. SINGLE TURN ARROWS USED TO CONVEY A MANDATORY MOVEMENT MUST BE ACCOMPANIED STANDARD SIGNS AND THE PAVEMENT MARKING WORD "ONLY".
  10. PAVEMENT MARKINGS ARE TO BE LOCATED AS SPECIFIED IN THE DESIGN PLANS.


CITY OF HOUSTON HOUSTON PUBLIC WORKS	
STANDARD PAVEMENT MARKING - SYMBOLS (NOT TO SCALE)	
 CITY TRAFFIC ENGINEER CITY ENGINEER	 DIRECTOR OF HOUSTON PUBLIC WORKS
EFF DATE: JUL-01-2018	DWG NO: 01510-04

# CENTERLINE & FOR ALL TWO LANE STREETS WITH PASSING ZONE

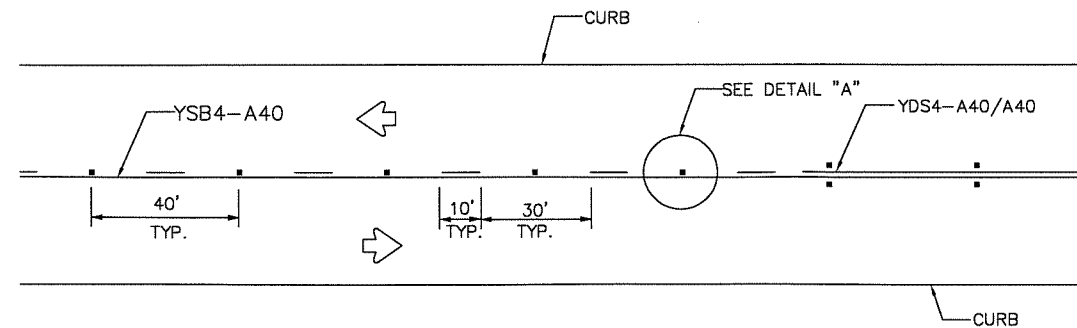


# CENTERLINE & LANE LINES FOR FOUR LANE TWO-WAY STREETS

RRPM TYPE C, CLEAR FACE TOWARD NORMAL TRAFFIC, SHALL BE PLACED ON 40-FOOT CENTERS.

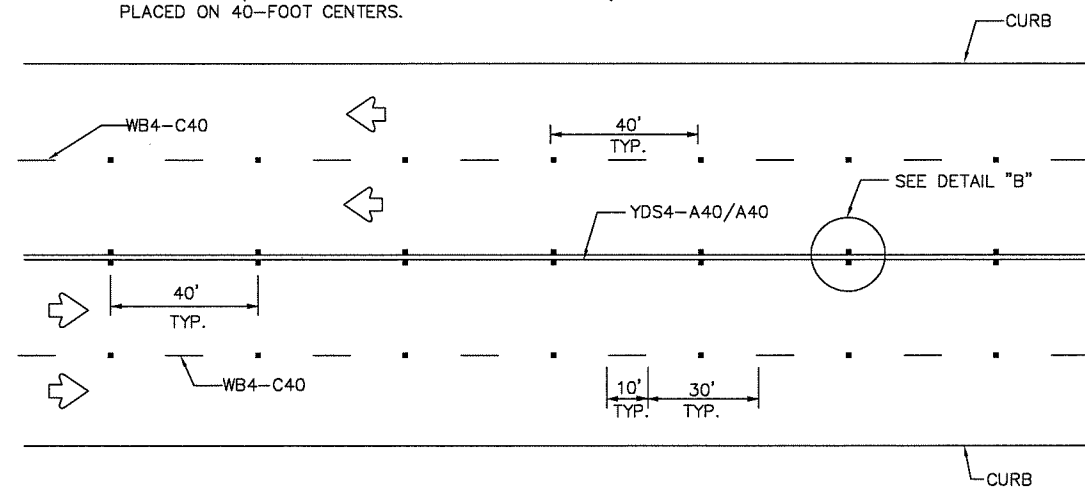


# CENTERLINE & LANE LINES FOR TWO-WAY LEFT TURN LANE

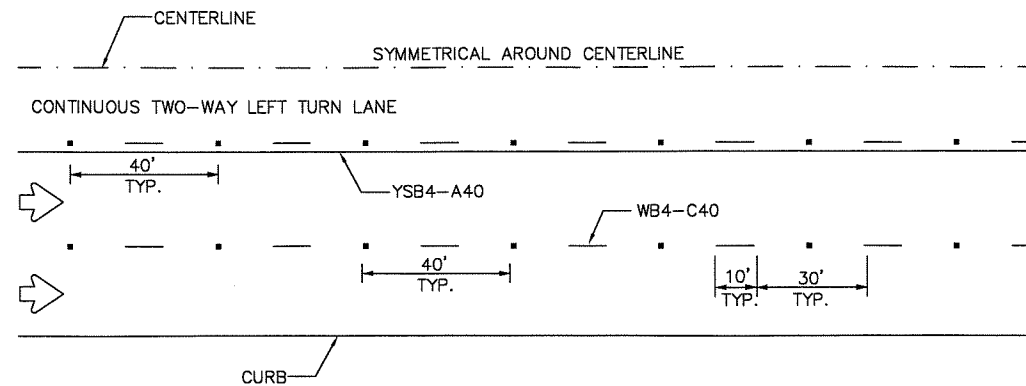

# LANE LINES FOR ONE-WAY MULTILANE STREET


RRPM TYPE R SHALL HAVE CLEAR FACE TOWARD NORMAL TRAFFIC AND RED FACE TOWARD WRONG-WAY TRAFFIC.

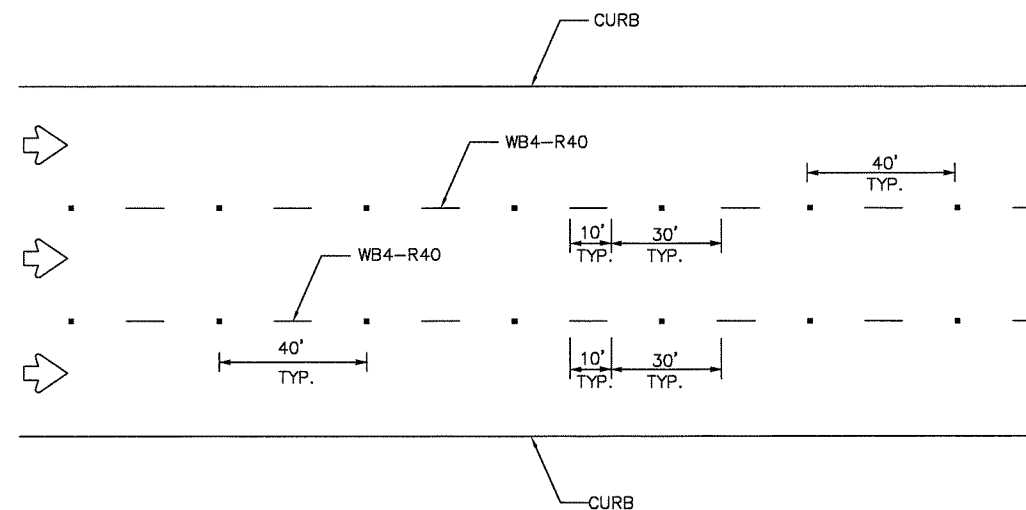


## GENERAL NOTES:

1. EDGE LINE ADJACENT TO CURB AND GUTTER IS NOT REQUIRED IN ALL CASES, HOWEVER SHALL BE PLACED AS DIRECTED BY CITY TRAFFIC ENGINEER.
2. THE TRAVELED WAY INCLUDES ONLY THAT PORTION OF THE ROADWAY USED FOR VEHICULAR TRAVEL AND NOT THE PARKING LANES, SIDEWALKS, BERMS AND SHOULDERS. THE TRAVELED WAYS SHALL BE MEASURED FROM THE INSIDE OF EDGE LINE TO INSIDE OF EDGE LINE OF A TWO LANE ROADWAY.
3. ALL RAISED PAVEMENT MARKERS PLACED IN BROKEN LINES SHALL BE PLACED IN LINE WITH AND MIDWAY BETWEEN THE STRIPES.
4. ON CONCRETE PAVEMENTS THE RAISED PAVEMENT MARKERS SHOULD BE PLACED TO ONE SIDE OF THE LONGITUDINAL JOINTS.
5. ALL PAVEMENT MARKING MATERIAL SHALL MEET THE REQUIRED MATERIAL SPECIFICATIONS AS SPECIFIED BY CITY OF HOUSTON STANDARD SPECIFICATIONS.


## GUIDE FOR PLACEMENT OF STOP LINES & CENTERLINE

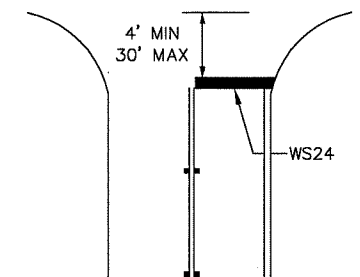


## DETAIL "A"



## DETAIL "B"

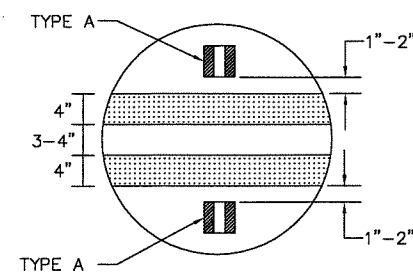

## REFLECTIVE RAISED PAVEMENT MARKERS

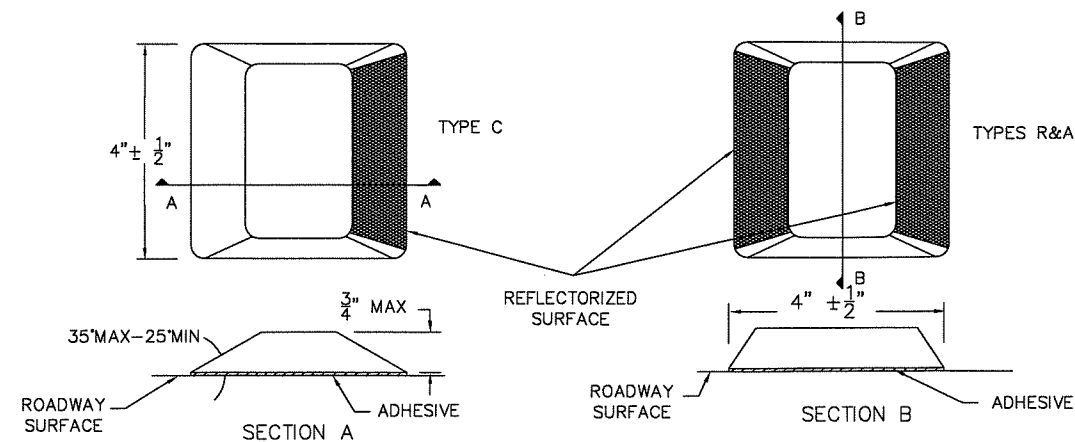

## CITY OF HOUSTON HOUSTON PUBLIC WORKS

STANDARD PAVEMENT MARKINGS WITH  
REFLECTIVE RAISED PAVEMENT MARKERS  
FOR POSITION GUIDANCE  
(NOT TO SCALE)


*John T. Myer*  
CITY TRAFFIC ENGINEER  
CITY ENGINEER

*Carol Haddad*  
DIRECTOR OF  
HOUSTON PUBLIC WORKS


EFF DATE: JUL-01-2018

DWG NO: 01510-05


LANE LINES FOR DIVIDED STREET

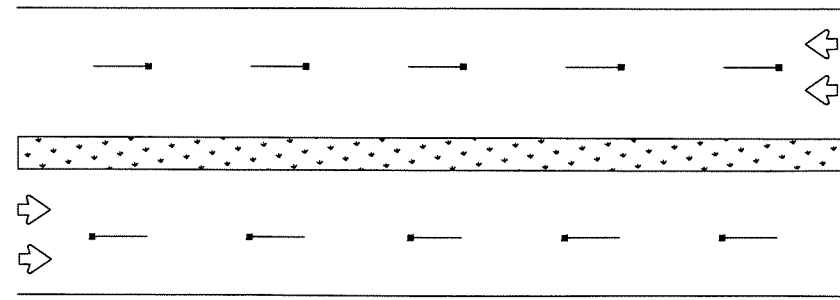

LANE & CENTER LINES FOR MULTILANE UNDIVIDED STREETS

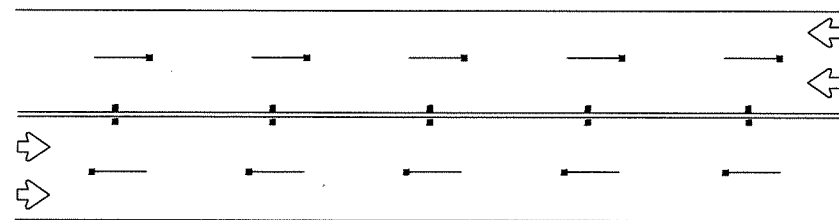


TWO-WAY LEFT TURN LANE

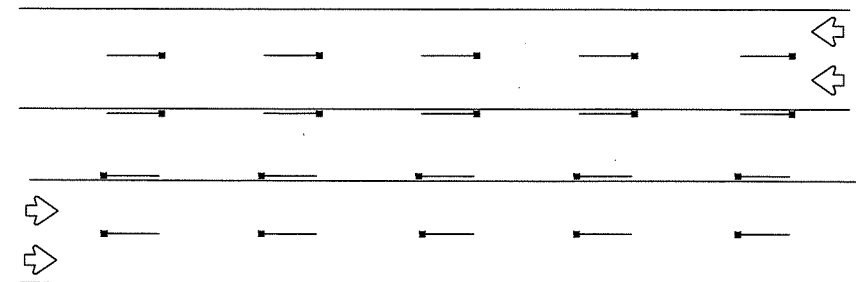


# TEMPORARY PAVEMENT MARKINGS PLACEMENT DETAILS

DOUBLE  
YELLOW  
LINE

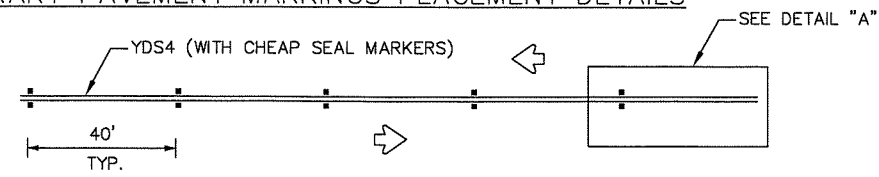


SOLID LINES


EDGE LINE  
OR  
SINGLE  
NO-PASSING  
LINE

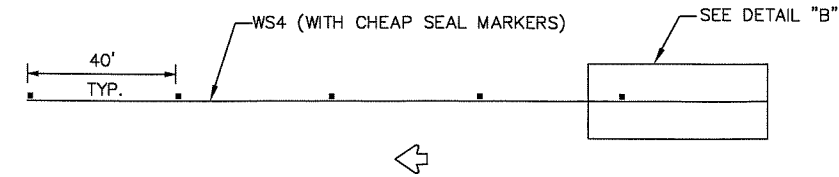


BROKEN  
LINE




YELLOW DOUBLE  
BROKEN LINE

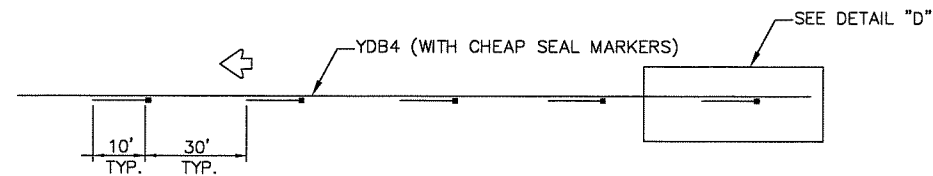


DETAIL "A"

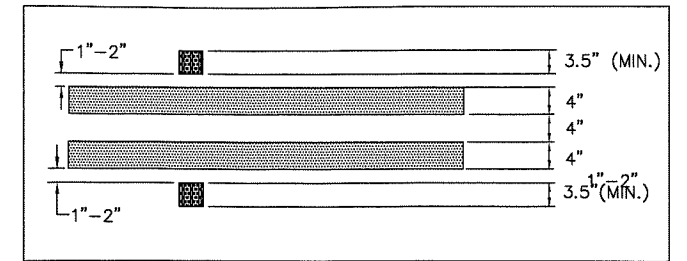


DETAIL "B"

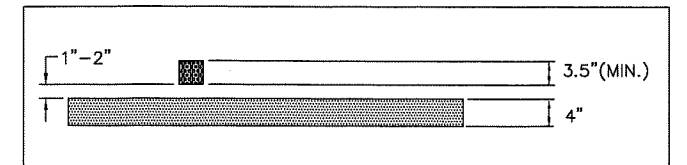

DETAIL "C"

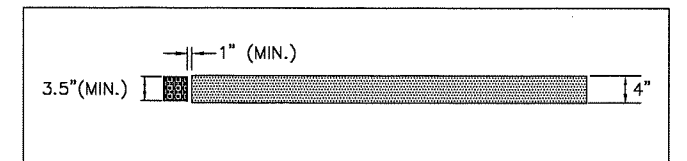


DETAIL "D"

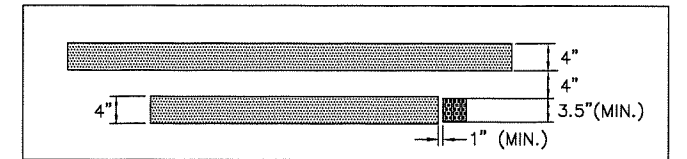

## NOTES:

1. YELLOW MARKERS SHALL HAVE YELLOW BODIES AND YELLOW REFLECTIVE TAPE.
2. WHITE MARKERS SHALL HAVE WHITE BODIES AND WHITE REFLECTIVE TAPE.
3. ONE-WAY OR TWO-WAY REFLECTIVE SHALL BE USED AS NECESSARY FOR APPLICATION.
4. THE CLEAR PLASTIC COVER MAY VARY FROM ONE MANUFACTURER TO ANOTHER IF DEEMED NECESSARY BY SPECIFIC PROJECT.
5. ALL TEMPORARY PAVEMENT MARKERS SHALL BE PLACED WITH REFLECTIVE SIDE FACING ON COMING TRAFFIC.
6. ALL TEMPORARY STRIPING SHALL BE WATER BASED PAINT.

## TEMPORARY CHIP SEAL MARKER DETAIL

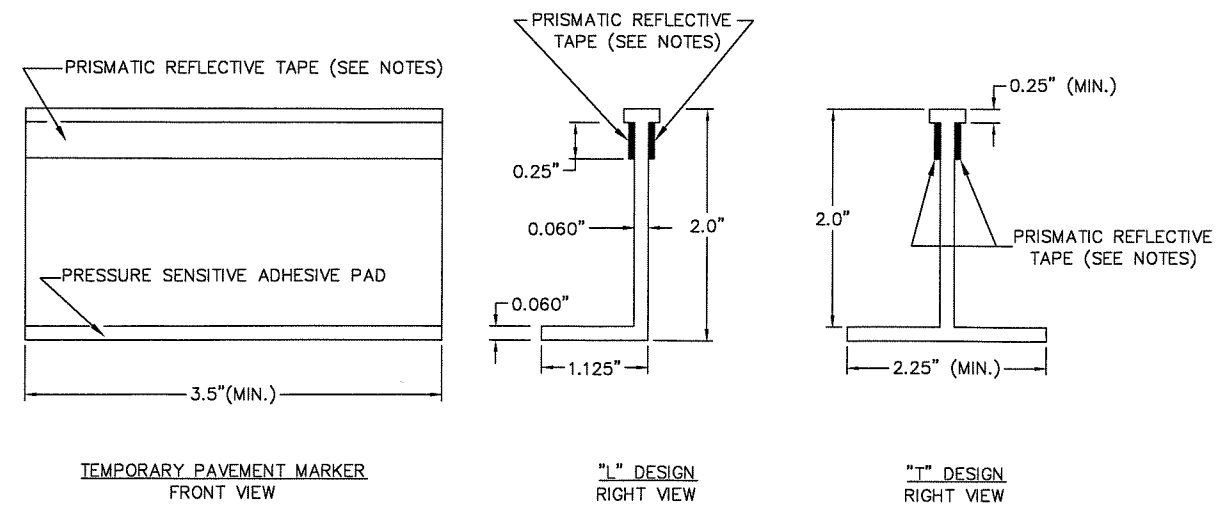

TEMPORARY PAVEMENT MARKER  
FRONT VIEW

"L" DESIGN  
RIGHT VIEW

"T" DESIGN  
RIGHT VIEW

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

REFLECTIVE CHIP SEAL MARKER  
USE FOR TEMPORARY MARKINGS

(NOT TO SCALE)


CITY TRAFFIC ENGINEER  
CITY ENGINEER

DIRECTOR OF  
HOUSTON PUBLIC WORKS



EFF DATE: JUL-01-2018

DWG NO: 01510-06

TYPICAL ACCESSIBLE PARKING SPACE DIMENSIONS

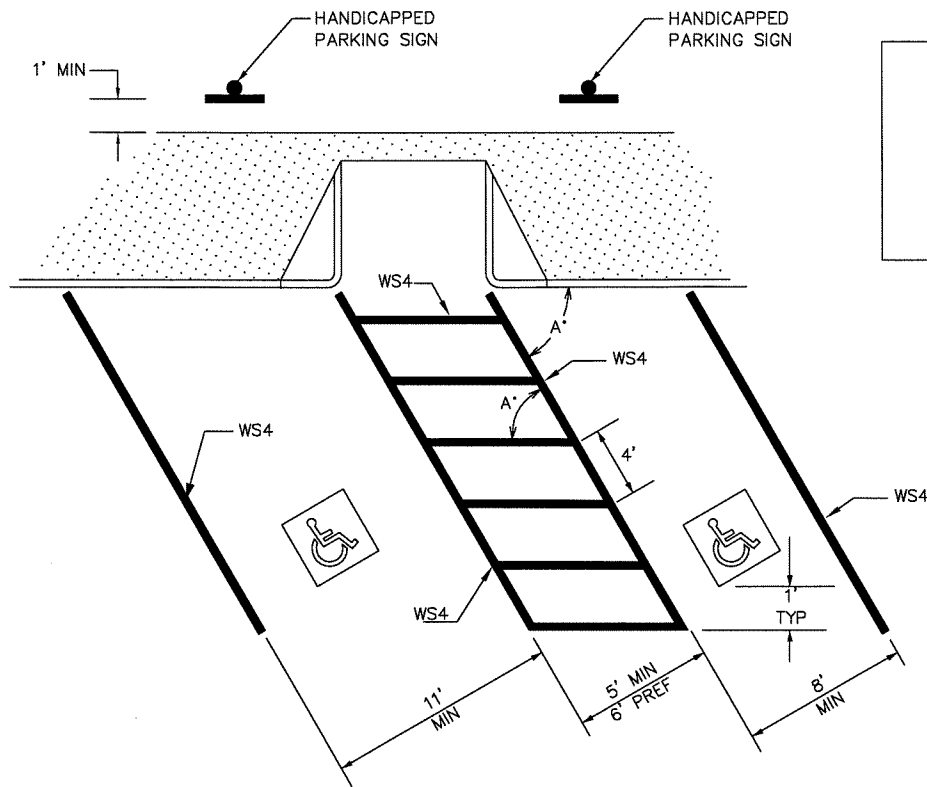


RAMP DETAILS ARE AS SHOWN ELSEWHERE IN THE PLANS. REFER TO CITY OF HOUSTON STANDARDS ON WHEELCHAIR RAMP CRITERIA.

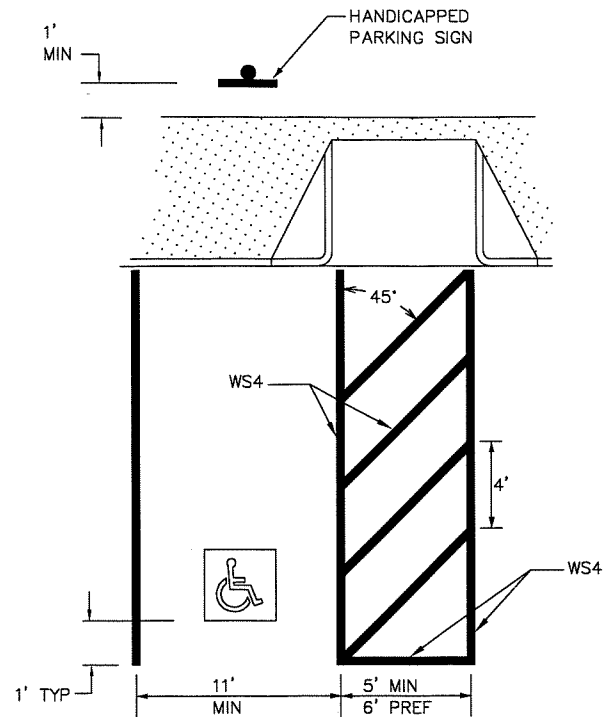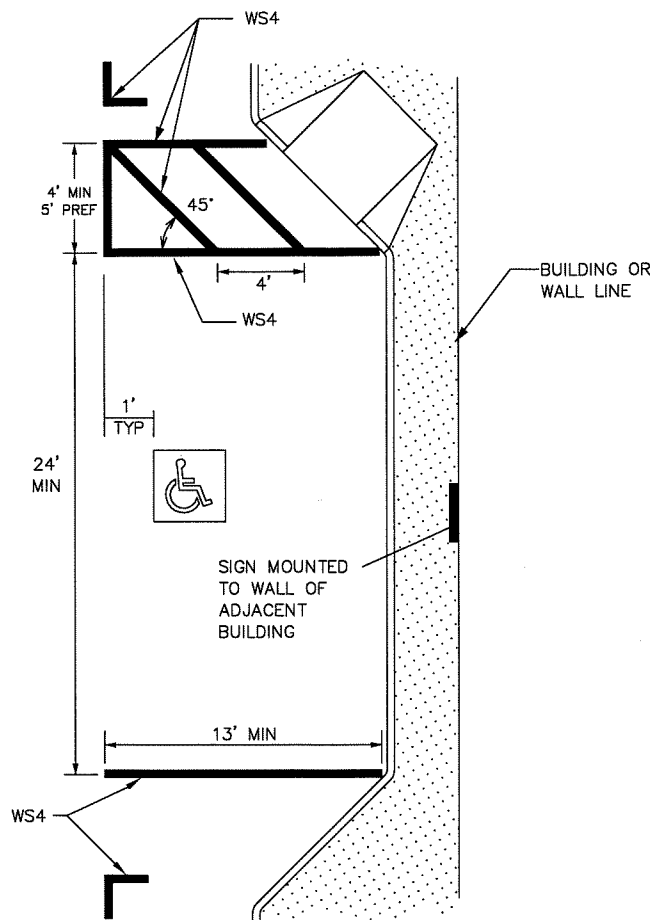


- NOTES:
1. ALL PARKING SPACE LIMIT LINES SHALL BE 4", WS4.
  2. AISLE MARKINGS SHOWN ARE EXAMPLES ONLY. OTHER METHODS TO INDICATE A NO PARKING AREA ARE ACCEPTABLE. AISLE MARKINGS SHALL BE WHITE.
  3. DIMENSIONS OF LIMIT LINES, AISLE MARKINGS, AND SYMBOL (WITH OR WITHOUT BACKGROUND) MAY VARY  $\pm 10\%$ .
  4. PAVEMENT MARKING SYMBOLS (WITH BACKGROUND):
    - A) ARE REQUIRED UNLESS STATED ELSEWHERE IN THE PLANS,
    - B) SHOULD BE PLACED TOWARD THE FAR END OF THE PARKING SPACES SO AS TO BE VISIBLE TO MOTORISTS IN THE TRAVEL LANE,
    - C) MAY BE PAINTED OR PREFABRICATED MATERIAL, AND
    - D) SHALL BE 30"x 30" MINIMUM.
  5. WITH APPROVAL OF THE CITY TRAFFIC ENGINEER, PREFABRICATED PAVEMENT MARKING SYMBOLS WITH BACKGROUND OF OTHER DIMENSIONS EXCEEDING THE 30"x 30" MINIMUM MAY BE USED. ALTERNATIVE DESIGNS SHALL INCLUDE A PROPORTION SIZED SYMBOL OF ACCESSIBILITY, AND SHALL CONFORM TO THE ILLUSTRATED COLORS FOR BACKGROUND, SYMBOL AND BORDER.
  6. ALL SLOPE IN AND AROUND EXPECTED WHEELCHAIR PATH SHALL NOT EXCEED ADA REQUIREMENTS FOR WHEELCHAIR RAMPS.
  7. REFER TO CITY OF HOUSTON TRAFFIC SIGN STANDARDS FOR HANDICAPPED PARKING SIGN DETAILS.
  8. NOTE THAT ANGLED PARKING ON PUBLIC ROADWAYS REQUIRE CITY COUNCIL APPROVAL BEFORE IMPLEMENTATION.

HANDICAPPED PAVEMENT MARKING SYMBOLS

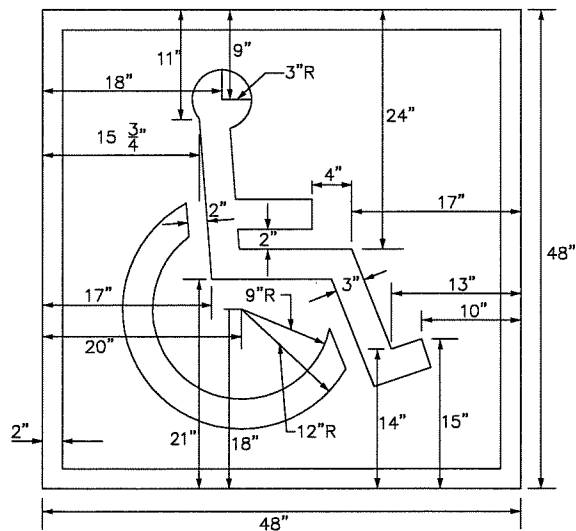




WITH BACKGROUND  
SYMBOL & BORDER: WHITE  
BACKGROUND: BLUE

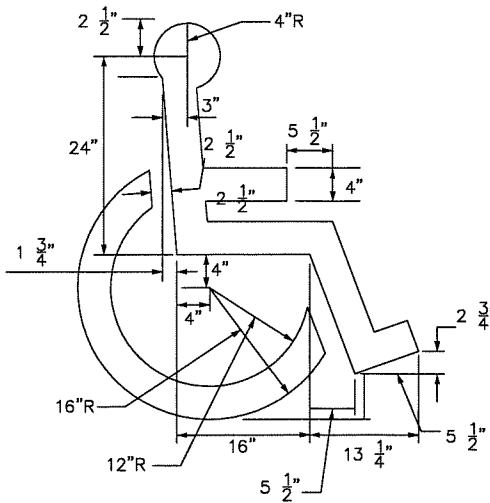

SYMBOL ONLY  
SYMBOL: BLUE OR WHITE

CITY OF HOUSTON HOUSTON PUBLIC WORKS	
PAVEMENT MARKINGS FOR ACCESSIBLE PARKING (NOT TO SCALE)	
 CITY TRAFFIC ENGINEER CITY ENGINEER	 DIRECTOR OF HOUSTON PUBLIC WORKS
EFF DATE: JUL-01-2018	DWG NO: 01510-07



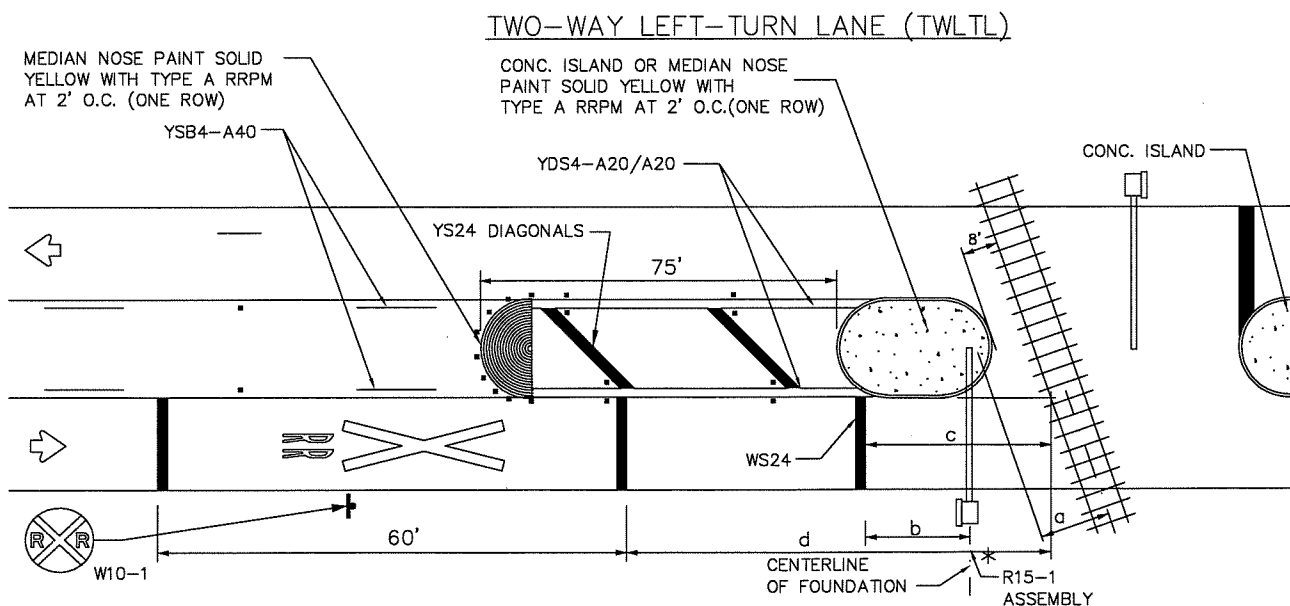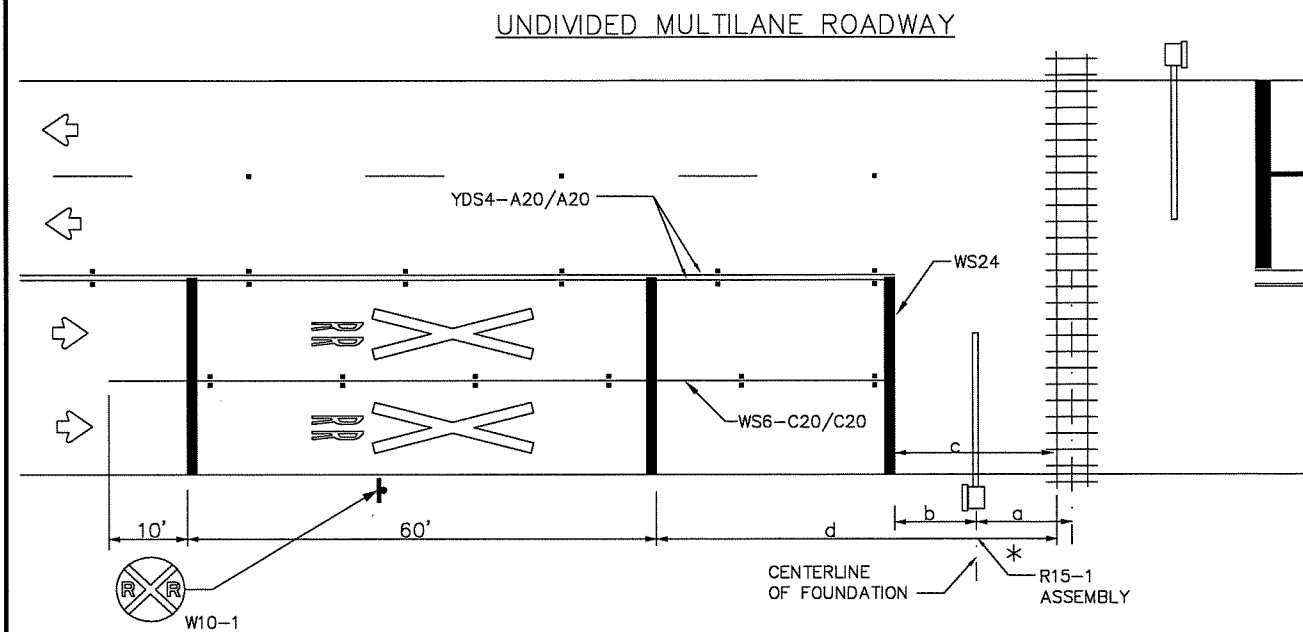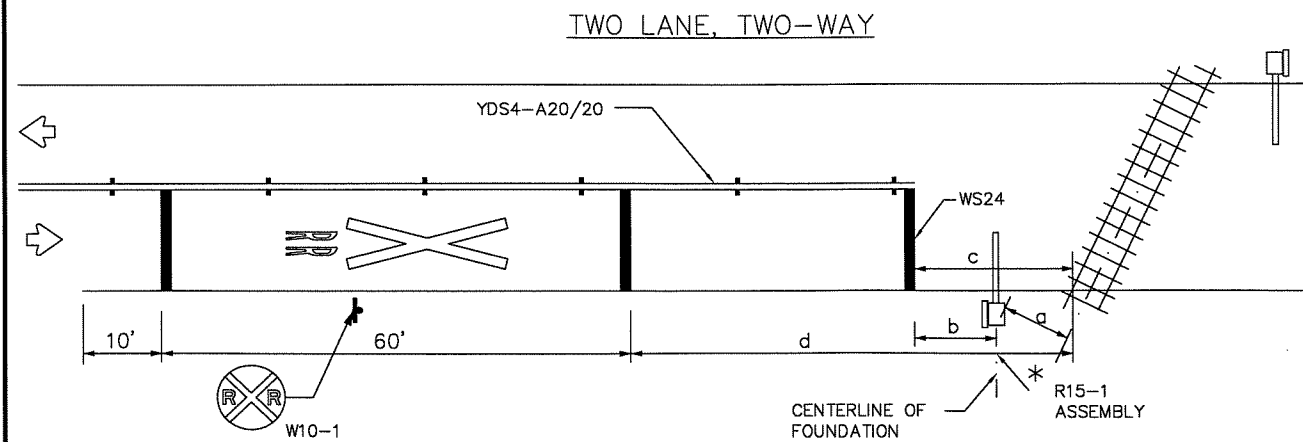



a = 12 FEET MINIMUM, 15 FEET USUAL, IF ACTIVE WARNING DEVICES ARE PRESENT. DISTANCE "a" SHOULD BE MEASURED FROM THE CENTERLINE OF \* R15-1 ASSEMBLY TO THE CENTERLINE OF NEAREST TRACK.

b = STOP LINES SHOULD BE APPROXIMATELY 8 FEET IN ADVANCE OF ACTIVE WARNING DEVICES (TYPE A, E OR F). STOP LINE SHOULD BE APPROXIMATELY 15 FEET FROM NEAR RAIL IF ONLY PASSIVE DEVICES (R15-1, PLUS R15-2 WHEN APPLICABLE) ARE PRESENT.

c = 15 FEET DESIRABLE MINIMUM IF NO GATE OR SIGNAL IS PRESENT. R15-1 SHOULD BE PLACED BETWEEN STOP LINE AND RAILS WITH ADEQUATE DISTANCE PROVIDED FOR "a".

APPROACH SPEED (MPH)	DESIRABLE PLACEMENT (FEET)
20	145
25	220
30	295
35	370
40	445
45	520
50	595
55	670
60	745
65	820
70	900

\* LOCAL CONDITIONS MAY REQUIRE ALTERNATE PLACEMENT LOCATIONS.

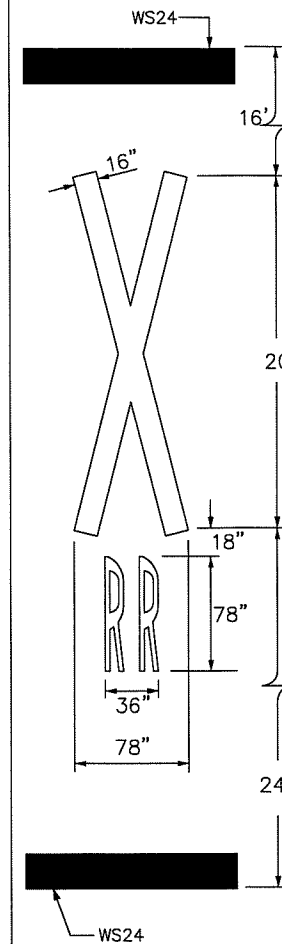

# NOTES:

1. THE PAVEMENT MARKINGS ON AN APPROACH TO A RAILROAD GRADE CROSSING SHALL CONSIST OF:
  - A) THE RR X-ING SYMBOL,
  - B) THREE TRANSVERSE 24" LINES, AND
  - C) LANE LINES: A SOLID NO PASSING LINE FOR TWO-WAY TRAFFIC APPROACHES, OR SOLID LAND LINES FOR MULTILANE APPROACHES.
2. FOR BIDDING PURPOSES, THE RR X-ING SYMBOL WILL BE MEASURED AND PAID FOR AS FOR EACH (EA) LANE IN PLACE. THE TRANSVERSE MARKINGS AND LANE LINES WILL BE MEASURED AND PAID FOR BY THE LINEAR FOOT (LF).
3. APPROACH LANES LESS THAN 8 FOOT WIDTH SHALL NOT HAVE MARKINGS.
4. MARKINGS SHOULD NOT BE PLACED WHERE LESS THAN 110 FEET OF APPROACH ROADWAY IS AVAILABLE FOR PLACEMENT UNLESS DIRECTED BY CITY TRAFFIC ENGINEER.
5. RR X-ING SYMBOLS SHOULD BE PLACED APPROXIMATELY IN THE CENTER OF THE APPROACH LANE.
6. ALL TRANSVERSE MARKINGS, INCLUDING STOP LINES, SHALL BE PLACED AT RIGHT ANGLES TO THE CENTERLINE AND ACROSS ALL APPROACH LANES.
7. EXISTING NON-STANDARD MARKINGS SHALL BE REMOVED TO THE FULLEST EXTENT POSSIBLE SO AS NOT TO LEAVE A DISCERNABLE MARKING, BY ANY METHOD APPROVED BY THE CITY TRAFFIC ENGINEER. OVERPAINTING WILL NOT BE ALLOWED.
8. ADDITIONAL MARKINGS AND PLACEMENT DETAILS MAY BE FOUND IN THE TMUTCD, APPENDIX H.
9. THE CITY TRAFFIC ENGINEER MAY REQUIRE ADDITIONAL LONGITUDINAL MARKINGS IF THE DISTANCE BETWEEN THE STOP LINES IS GREATER THAN 80 FEET. MARKINGS ARE NOT REQUIRED ACROSS OR BETWEEN THE RAILS UNLESS SPECIFIED ELSEWHERE IN THE PLANS.

SIGN W10-1 TO BE PLACED AS SHOWN IN TYPICAL DETAILS WHEN PAVEMENT MARKINGS ARE INSTALLED.

\* R15-1 ASSEMBLY MAY CONSIST OF ONE OR MORE OF THE FOLLOWING:

- |        |                     |
|--------|---------------------|
| R15-1  | CROSSBUCK SIGN      |
| R15-2  | MULTIPLE TRACK SIGN |
| TYPE A | MAST FLASHERS       |
| TYPE E | CANTILEVERS         |
| TYPE F | GATES               |

**CITY OF HOUSTON**  
HOUSTON PUBLIC WORKS

**RAILROAD CROSSING PAVEMENT MARKINGS DETAILS**

(NOT TO SCALE)


*[Signature]*  
CITY TRAFFIC ENGINEER  
*[Signature]*  
CITY ENGINEER

*[Signature]*  
DIRECTOR OF  
HOUSTON PUBLIC WORKS


EFF DATE: JUL-01-2018

DWG NO: 01510-08




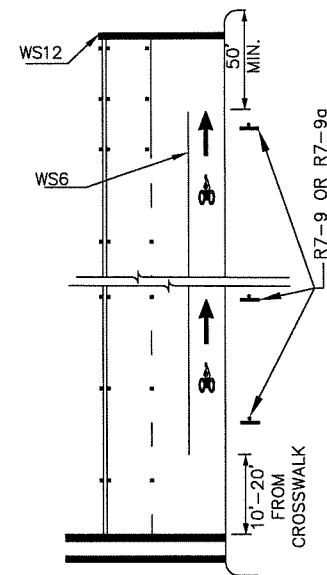


STANDARD BIKE LANES  
NO ON-STREET PARKING  
ALONG BICYCLE LANE

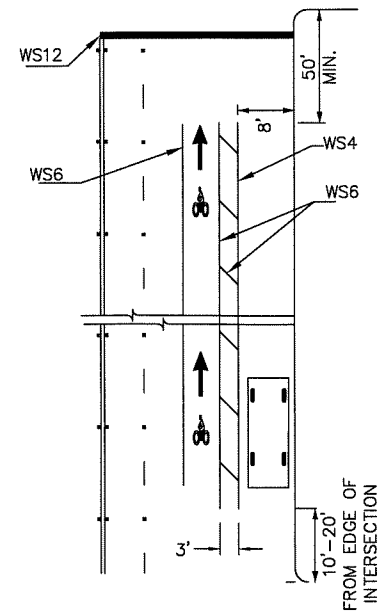


STANDARD BIKE LANES  
ON-STREET PARKING  
ALONG BICYCLE LANE

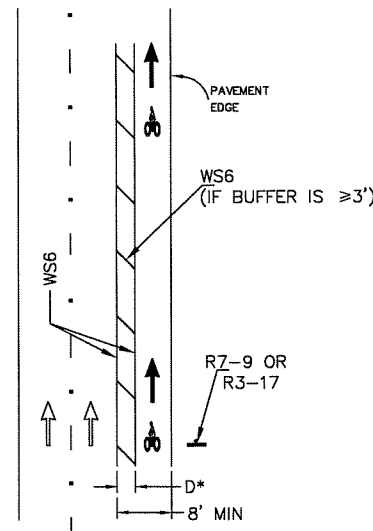


BUFFERED BIKE LANES  
\*DELINEATOR REQUIRED IF  $D < 2'$

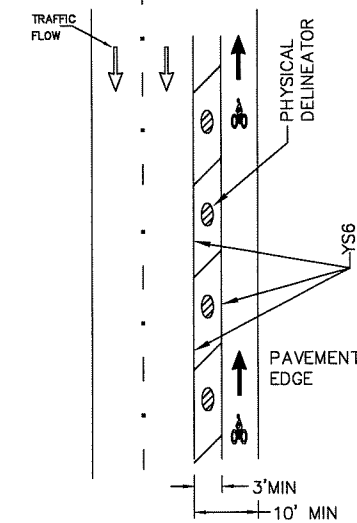


SEPARATED BIKE LANES  
ONE-WAY (CONTRA-FLOW)

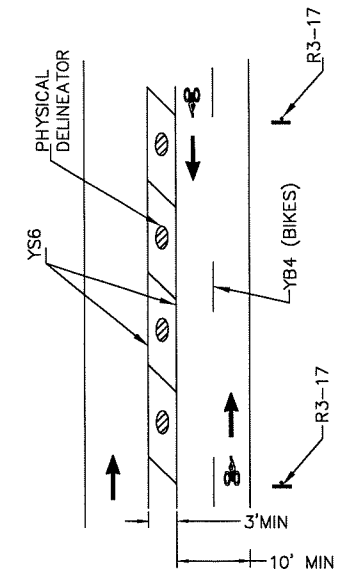


SEPARATED BIKE LANES  
TWO-WAY

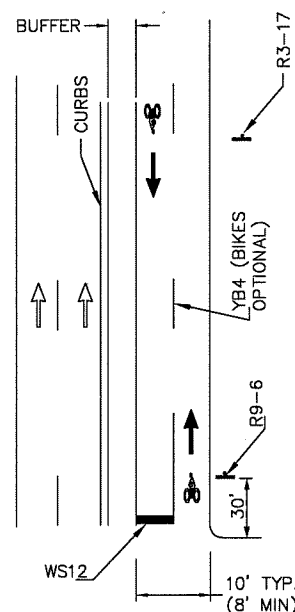

TWO-WAY SIDE PATH

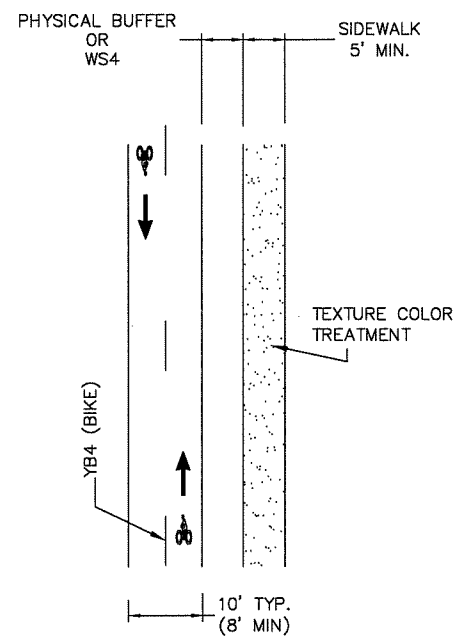


SIDEPATH WITH DEDICATED  
SIDEWALK

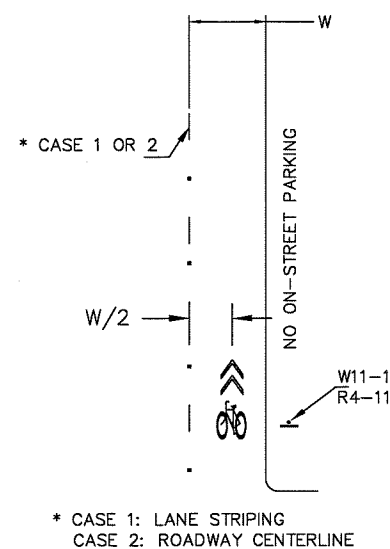

ROADWAY WITH SHARED LANE

- NEIGHBORHOOD BIKEWAY
- COLLECTOR/ THOROUGHFARE
- NO ON-STREET PARKING

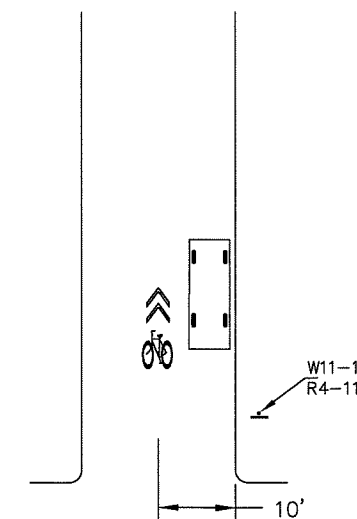

ROADWAY WITH SHARED LANE

- NEIGHBORHOOD STREET
- NO CENTER LINE OR LANE MARKING
- ON STREET PARKING

NOTES:

1. ALL PAVEMENT MARKINGS SHALL BE WHITE EXCEPT WHEN NOTED OTHERWISE ON PLANS.
2. PAVEMENT MARKINGS SHALL BE OF THE MATERIALS SPECIFIED AND SHALL BE IN CONFORMANCE WITH MATERIAL SPECIFICATIONS AS SPECIFIED BY CITY OF HOUSTON STANDARD SPECIFICATIONS.
3. EXACT SIGN PLACEMENT AND DETAILS ARE SHOWN ELSEWHERE IN THE PLANS.
4. ADDITIONAL REFERENCES: TMUTCD (TEXAS MANUAL ON UNIFORM TRAFFIC CONTROL) GUIDE FOR THE DEVELOPMENT OF BICYCLES FACILITIES, AASHTO, LATEST EDITION.
5. SHARED LANE MARKING SHALL BE IMPLEMENTED ONLY ON ROADWAY SEGMENT BUT NOT WITHIN THE FUNCTIONAL LIMITS OF AN INTERSECTION.

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

BICYCLE LANE  
PAVEMENT MARKINGS

(NOT TO SCALE)


CITY TRAFFIC ENGINEER  
CITY ENGINEER

DIRECTOR OF  
HOUSTON PUBLIC WORKS


EFF DATE: JUL-01-2018

DWG NO: 01510-09


USE OF TREATMENTS ON THIS SHEET MUST BE PRE-APPROVED BY THE CITY TRAFFIC ENGINEER

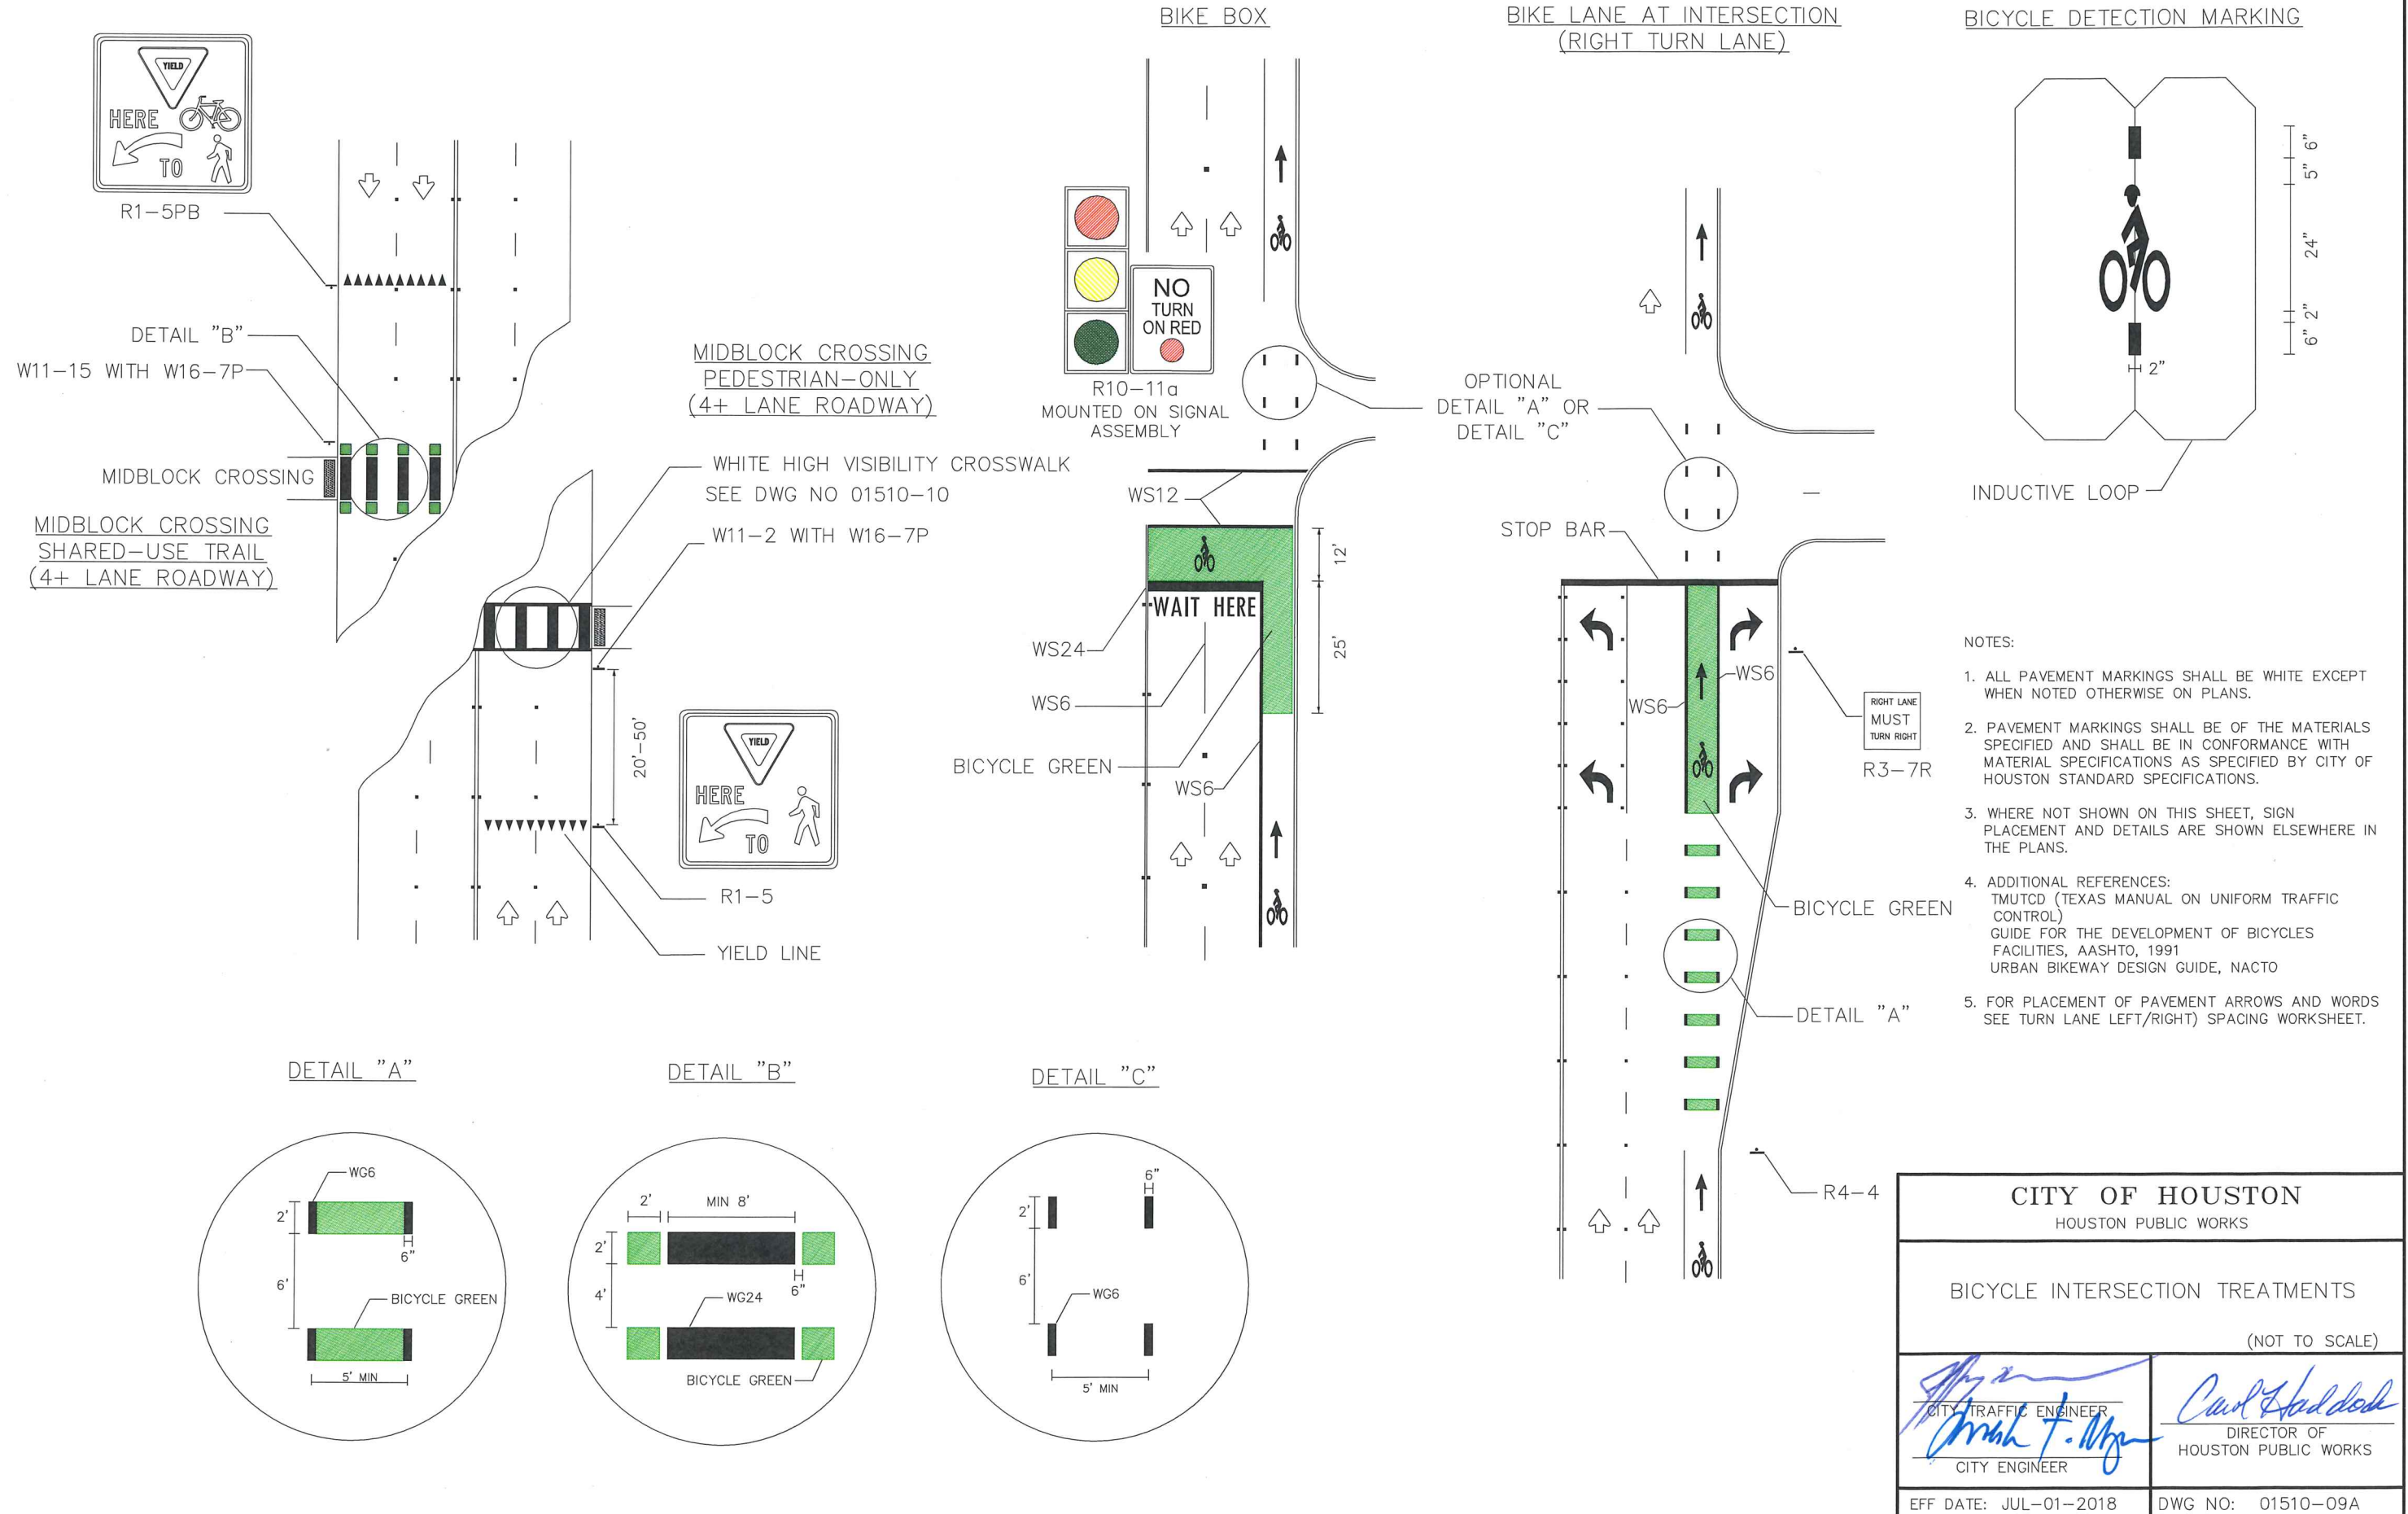


TWO LANES WITH SHOULDERS

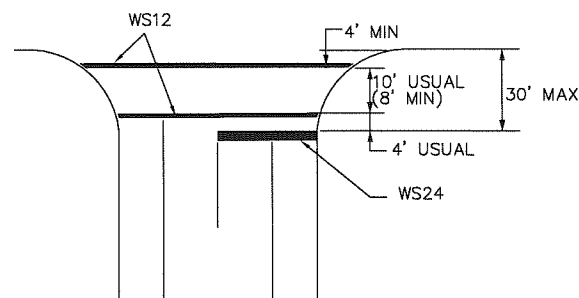


FOUR LANES WITH SHOULDERS

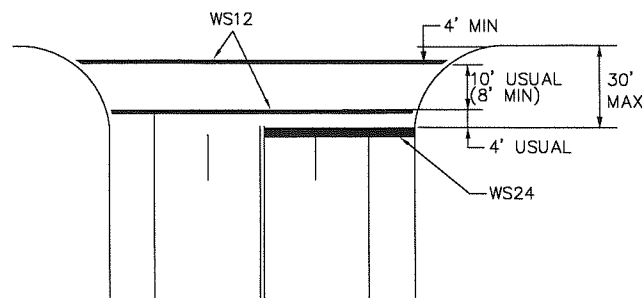


MULTI - LANES

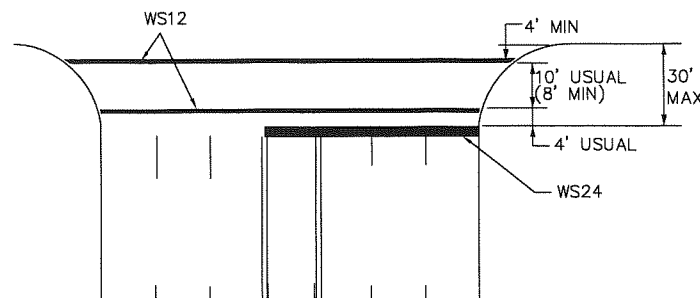


MULTI - LANE WITH MEDIAN

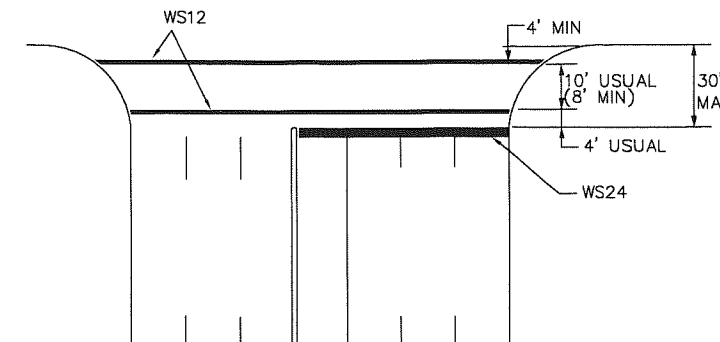


TWO LANES

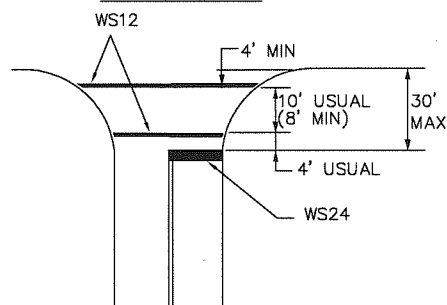


FOUR LANES

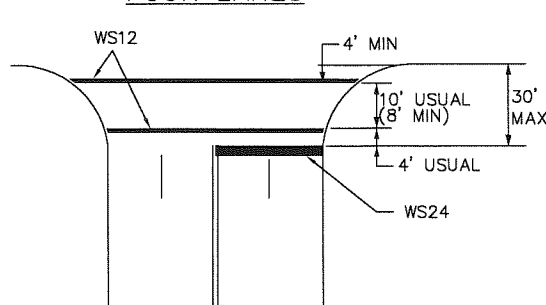

EXCLUSIVE PEDESTRIAN PHASE

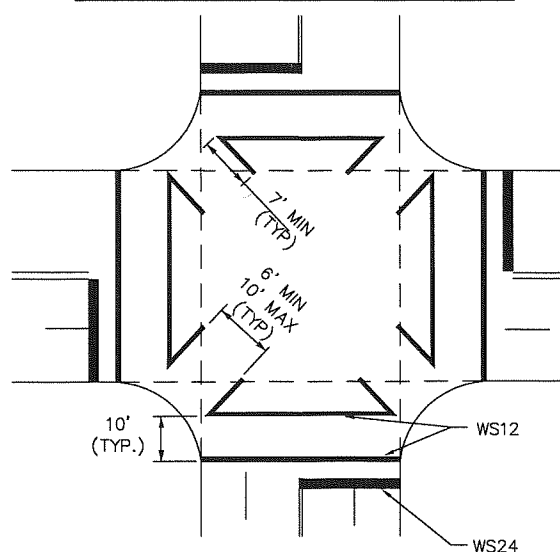


INTERSECTION WITH RIGHT - TURN ISLANDS

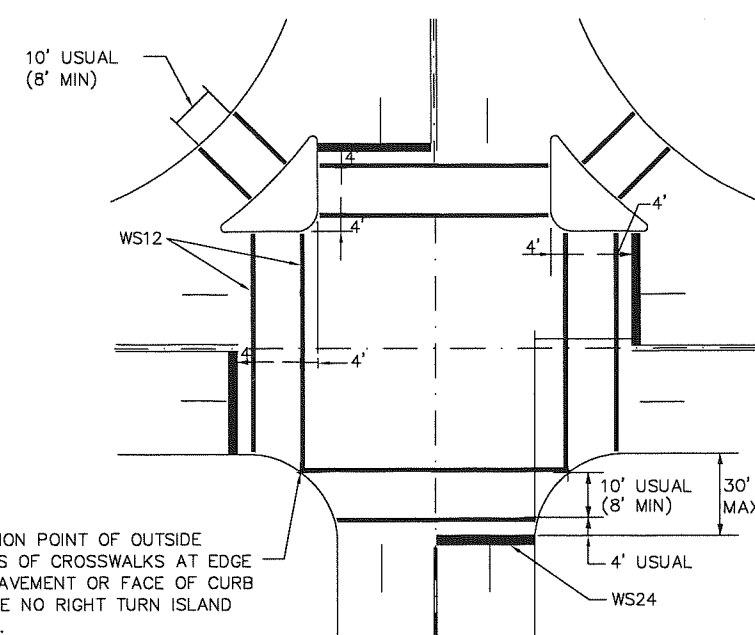


COMMON POINT OF OUTSIDE EDGES OF CROSSWALKS AT EDGE OF PAVEMENT OR FACE OF CURB WHERE NO RIGHT TURN ISLAND EXIST.

HIGH VISIBILITY CROSSWALK DETAIL

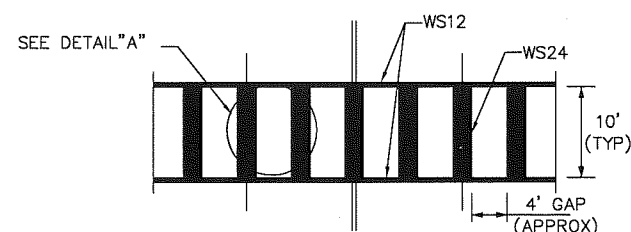

TYPICALLY USED AT SIGNALIZED AND NON-SIGNALIZED CROSSINGS ON COLLECTOR AND ARTERIAL ROADWAYS AND AT LOCATIONS REQUIRING EXTRA EMPHASIS.

DETAIL "A"

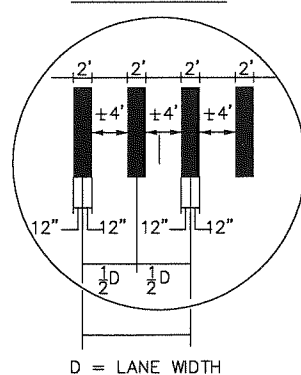

D = LANE WIDTH

NOTES:

1. CROSSWALKS AND STOP LINES SHALL BE WHITE.
2. "D" IS EQUAL TO ONE HALF THE WIDTH OF TRAVEL LANE.

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

TYPICAL CROSSWALK  
DETAILS




(NOT TO SCALE)

*[Signature]*  
CITY TRAFFIC ENGINEER  
*[Signature]*  
CITY ENGINEER

*[Signature]*  
DIRECTOR OF  
HOUSTON PUBLIC WORKS

EFF DATE: JUL-01-2018

DWG NO: 01510-10

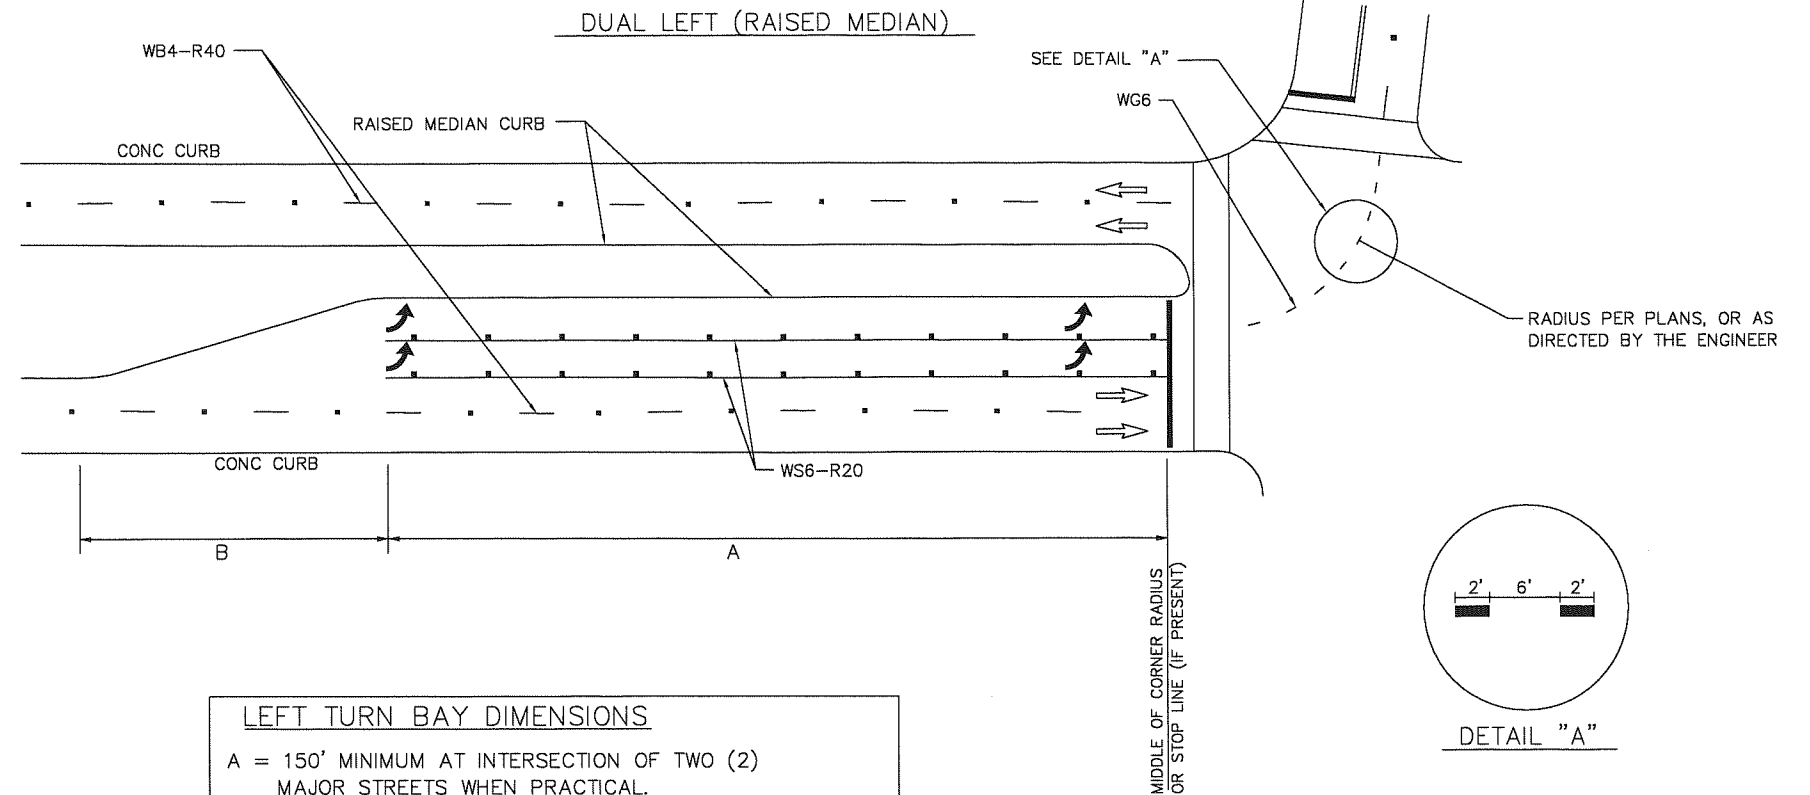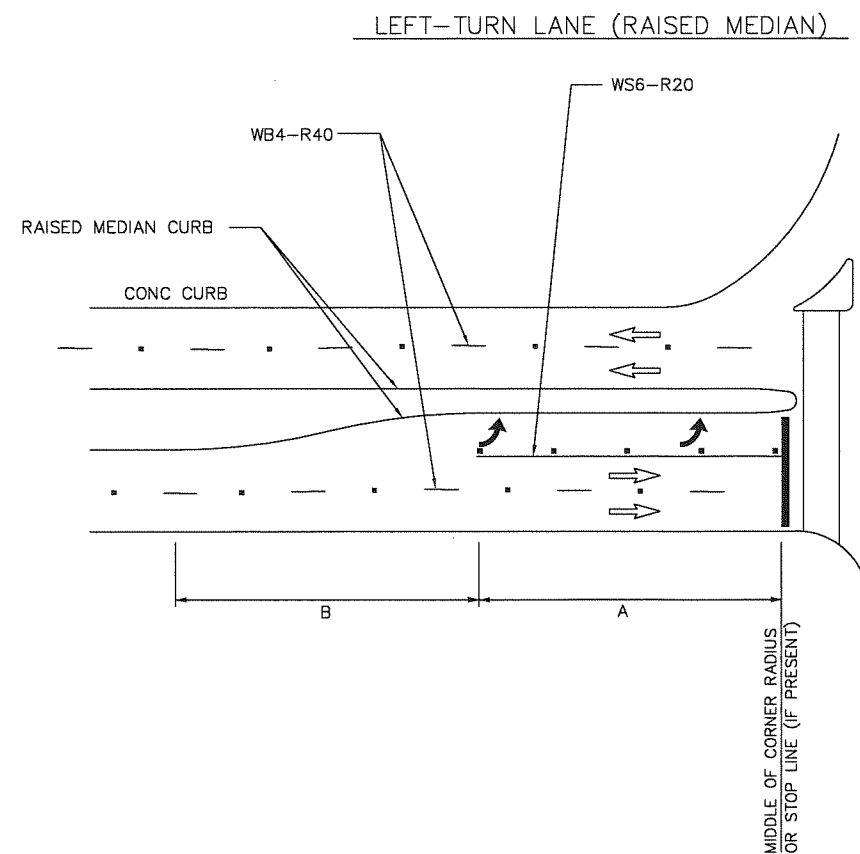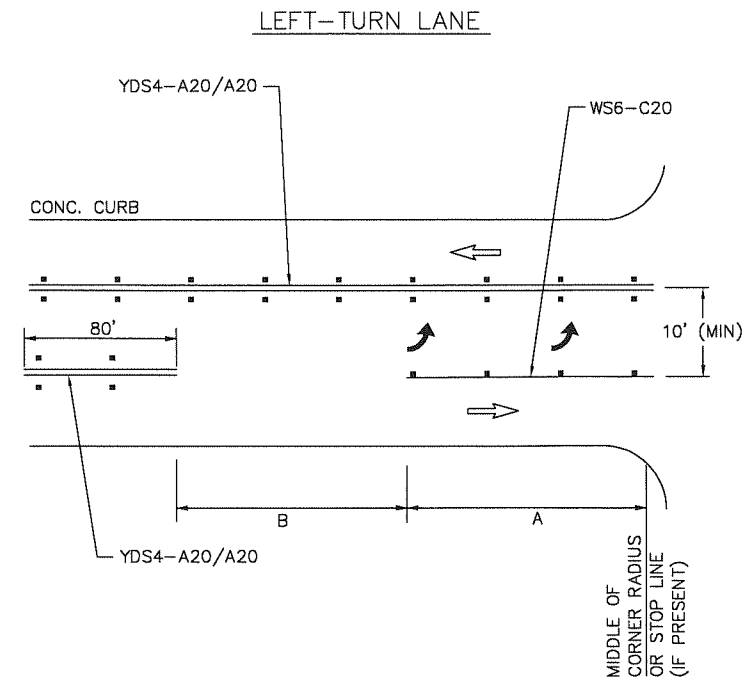

#### LEFT TURN BAY DIMENSIONS

A = 150' MINIMUM AT INTERSECTION OF TWO (2) MAJOR STREETS WHEN PRACTICAL.  
= 100' MINIMUM AT ALL OTHER INTERSECTIONS.

B = 100' MINIMUM ON STRAIGHT ROADWAYS.  
\*TAPER LENGTH MAY BE SHORTER IF IT IS ON A HORIZONTAL CURVE TO THE LEFT.  
\*TAPER LENGTH MAY BE LONGER IF CURVE IS TO THE RIGHT.

NOTE:  
1. DIMENSIONS SHALL BE ADJUSTED AS DETERMINED BY CITY OF HOUSTON TRAFFIC ENGINEER.  
2. REFER TO CITY OF HOUSTON DESIGN MANUAL (DWG No. 10.06-07) FOR DETAILS.

#### NOTES:

1. THE DIMENSIONS GIVEN FOR DUAL LEFT (RAISED MEDIAN) ON THIS SHEET ARE ALSO APPLICABLE FOR DUAL RIGHT-TURN LANES.
2. STORAGE LENGTHS LONGER THAN THE MINIMUMS LISTED ON THIS DRAWING MAY BE DETERMINED USING TRAFFIC ENGINEERING ANALYSIS.
3. FOR THE PLACEMENT OF PAVEMENT ARROWS AND WORDS SEE LEFT-TURN "ONLY" AND ARROW SPACING WORKSHEET.
4. REFER TO APPLICABLE STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKERS FOR POSITION GUIDANCE AND LEFT-TURN & RIGHT-TURN LANE STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKINGS.
5. REFER TO BICYCLE LANE PAVEMENT MARKINGS STANDARD FOR TYPE AND PLACEMENT.

**CITY OF HOUSTON**  
HOUSTON PUBLIC WORKS

LEFT-TURN LANE & RIGHT-TURN LANE  
DESIGN WORKSHEET 1

(NOT TO SCALE)



*[Signature]*  
CITY TRAFFIC ENGINEER  
*[Signature]*  
CITY ENGINEER

*[Signature]*  
DIRECTOR OF  
HOUSTON PUBLIC WORKS


EFF DATE: JUL-01-2018

DWG NO: 01510-11

PAINTED MEDIAN LEFT TURN BAY DETAILS

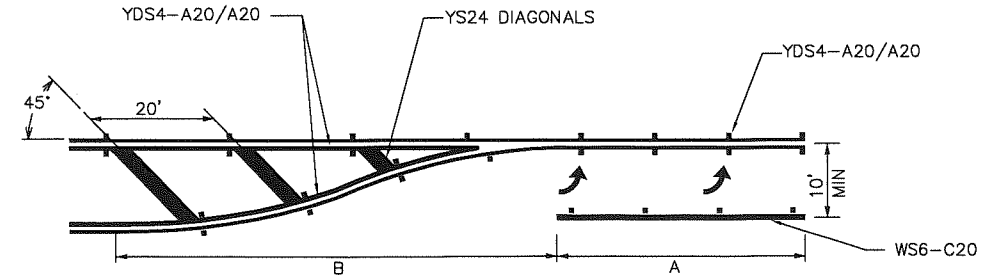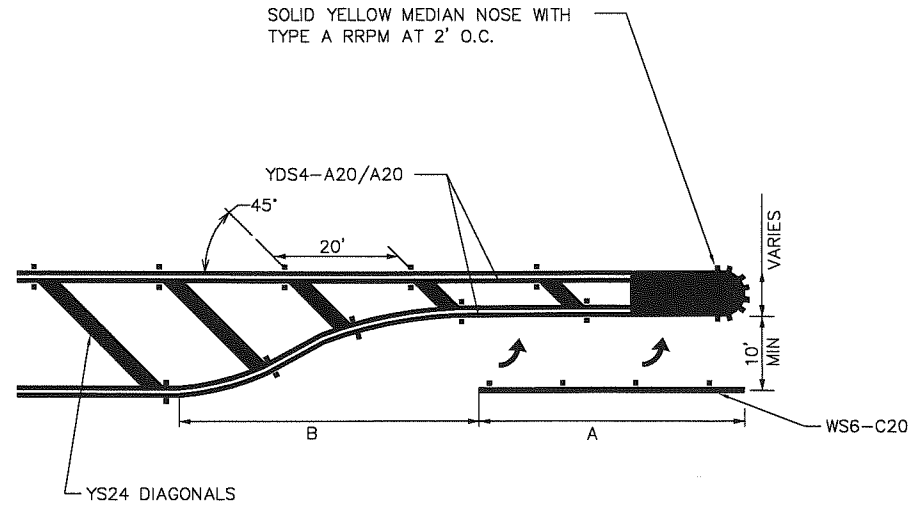

UNSIGNALIZED RIGHT-TURN LANE

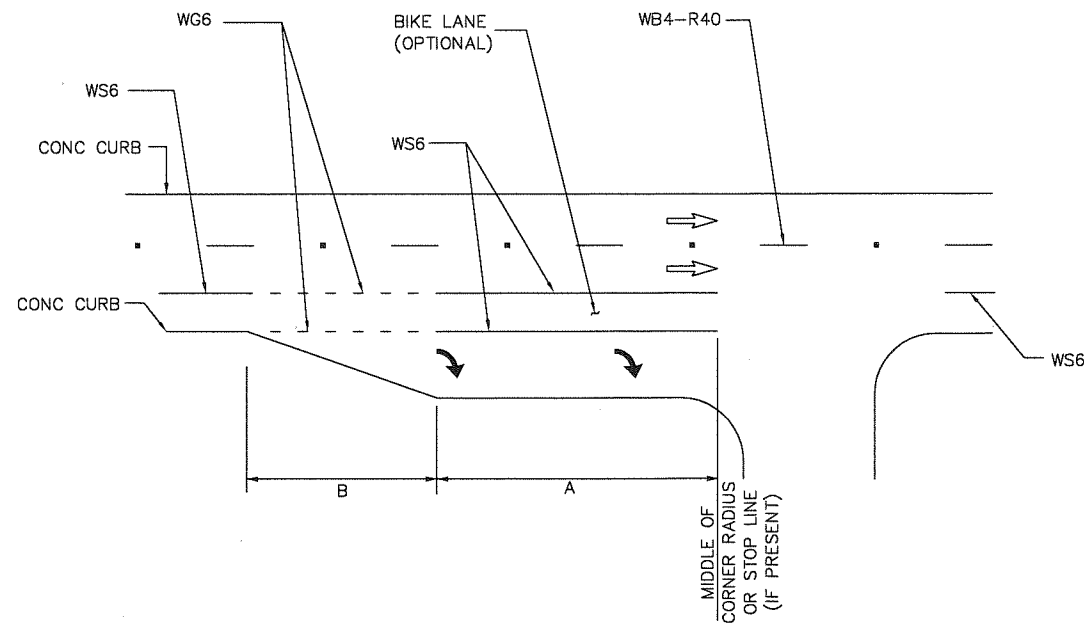

LEFT TURN BAY DIMENSIONS

A = 150' MINIMUM AT INTERSECTION OF TWO (2) MAJOR STREETS WHEN PRACTICAL.  
= 100' MINIMUM AT ALL OTHER INTERSECTIONS.

B = 100' MINIMUM ON STRAIGHT ROADWAYS.  
\*TAPER LENGTH MAY BE SHORTER IF IT IS ON A HORIZONTAL CURVE TO THE LEFT.  
\*TAPER LENGTH MAY BE LONGER IF CURVE IS TO THE RIGHT.

NOTE:  
1. DIMENSIONS SHALL BE ADJUSTED AS DETERMINED BY CITY OF HOUSTON TRAFFIC ENGINEER.  
2. REFER TO CITY OF HOUSTON DESIGN MANUAL (DWG No. 10.06-07) FOR DETAILS.

NOTES:

1. STORAGE LENGTHS LONGER THAN THE MINIMUMS LISTED ON THIS DRAWING MAY BE DETERMINED USING TRAFFIC ENGINEERING ANALYSIS OR APPROXIMATE CALCULATIONS.
2. FOR THE PLACEMENT OF PAVEMENT ARROWS AND WORDS SEE LEFT-TURN "ONLY" AND ARROW SPACING WORKSHEET.
3. REFER TO APPLICABLE STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKERS FOR POSITION GUIDANCE AND LEFT-TURN & RIGHT-TURN LANE STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKINGS.
4. REFER TO BICYCLE LANE PAVEMENT MARKINGS STANDARD FOR TYPE AND PLACEMENT.

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

LEFT-TURN LANE & RIGHT-TURN LANE  
DESIGN WORKSHEET 2

(NOT TO SCALE)


*[Signature]*  
CITY TRAFFIC ENGINEER  
*[Signature]*  
CITY ENGINEER

*[Signature]*  
DIRECTOR OF  
HOUSTON PUBLIC WORKS

EFF DATE: JUL-01-2018

DWG NO: 01510-12

TYPICAL TRANSITION AT BEGINNING AND END  
OF TWO-WAY CENTER LEFT-TURN LANE

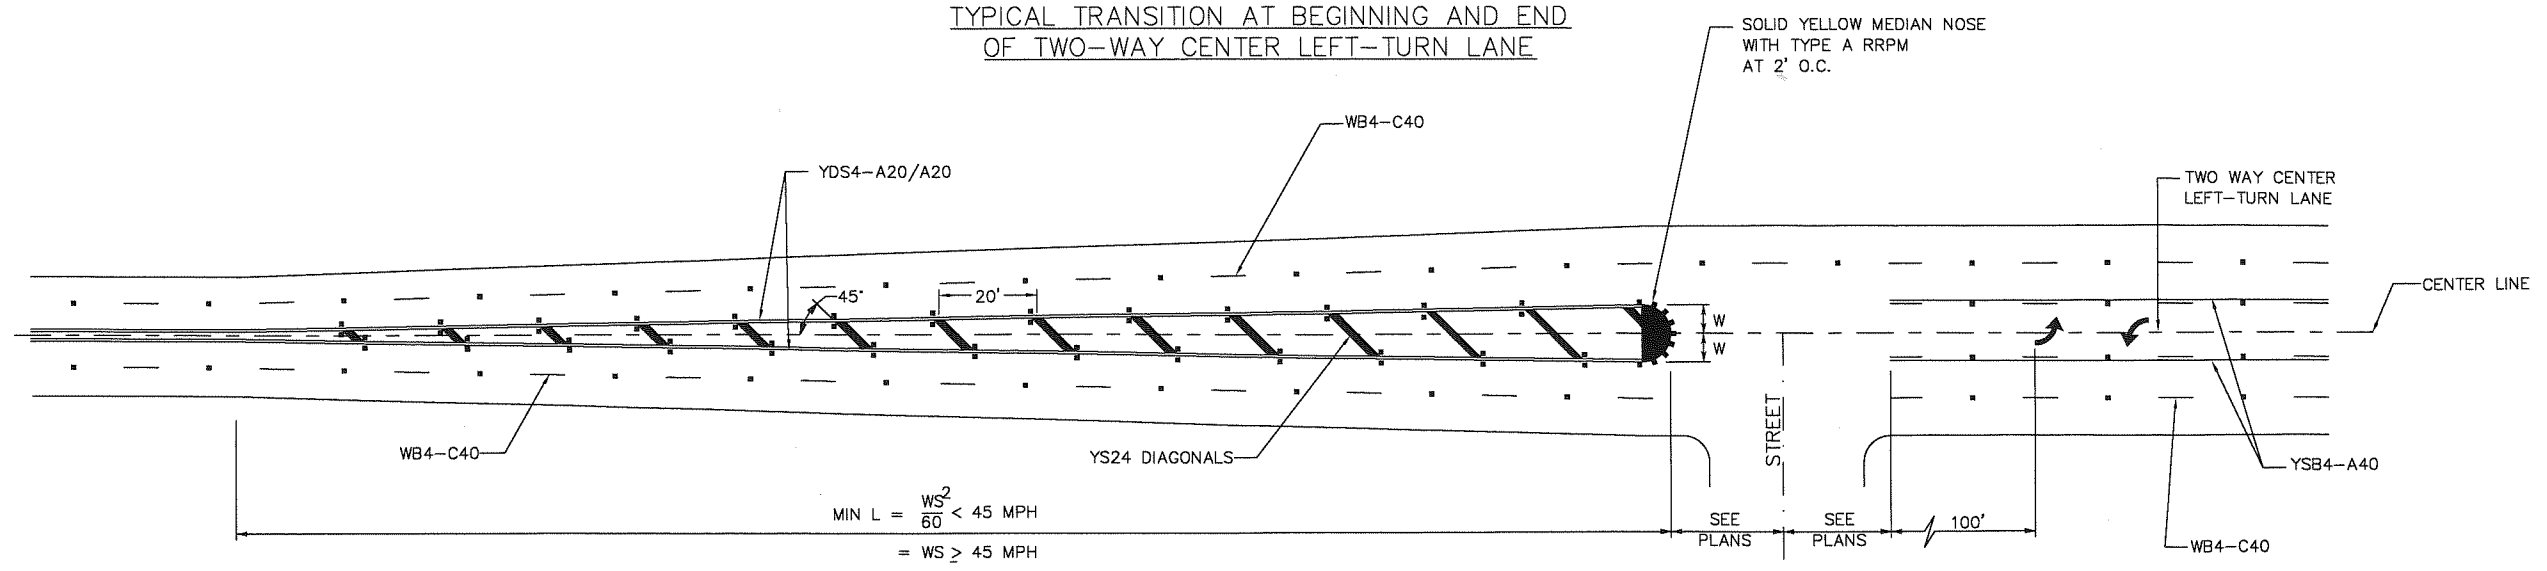

W = WIDTH OF OFFSET (FT)  
S = POSTED SPEED (MPH)  
L = LENGTH OF CROSSHATCHING (FT)


16' VARIES ONLY

**LEGEND**  
TYPICAL DETAIL  
(PLACE LEGENDS IN ACCORDANCE TO  
LEFT TURN "ONLY" AND ARROW SPACING WORKSHEET)

NOTE:

1. REFLECTIVE RAISED PAVEMENT MARKERS SHOULD BE IN ACCORDANCE WITH STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKERS FOR POSITION GUIDANCE AND LEFT-TURN & RIGHT-TURN LANE STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKERS.
2. SEE LEFT-TURN & RIGHT-TURN LANE DESIGN WORKSHEET FOR APPLICABLE INFORMATION.
3. SEE LEFT-TURN "ONLY" AND ARROW SPACING WORKSHEET.


TWO-WAY LEFT-TURN LANE DETAILS  
NON-SIGNALIZED INTERSECTIONS

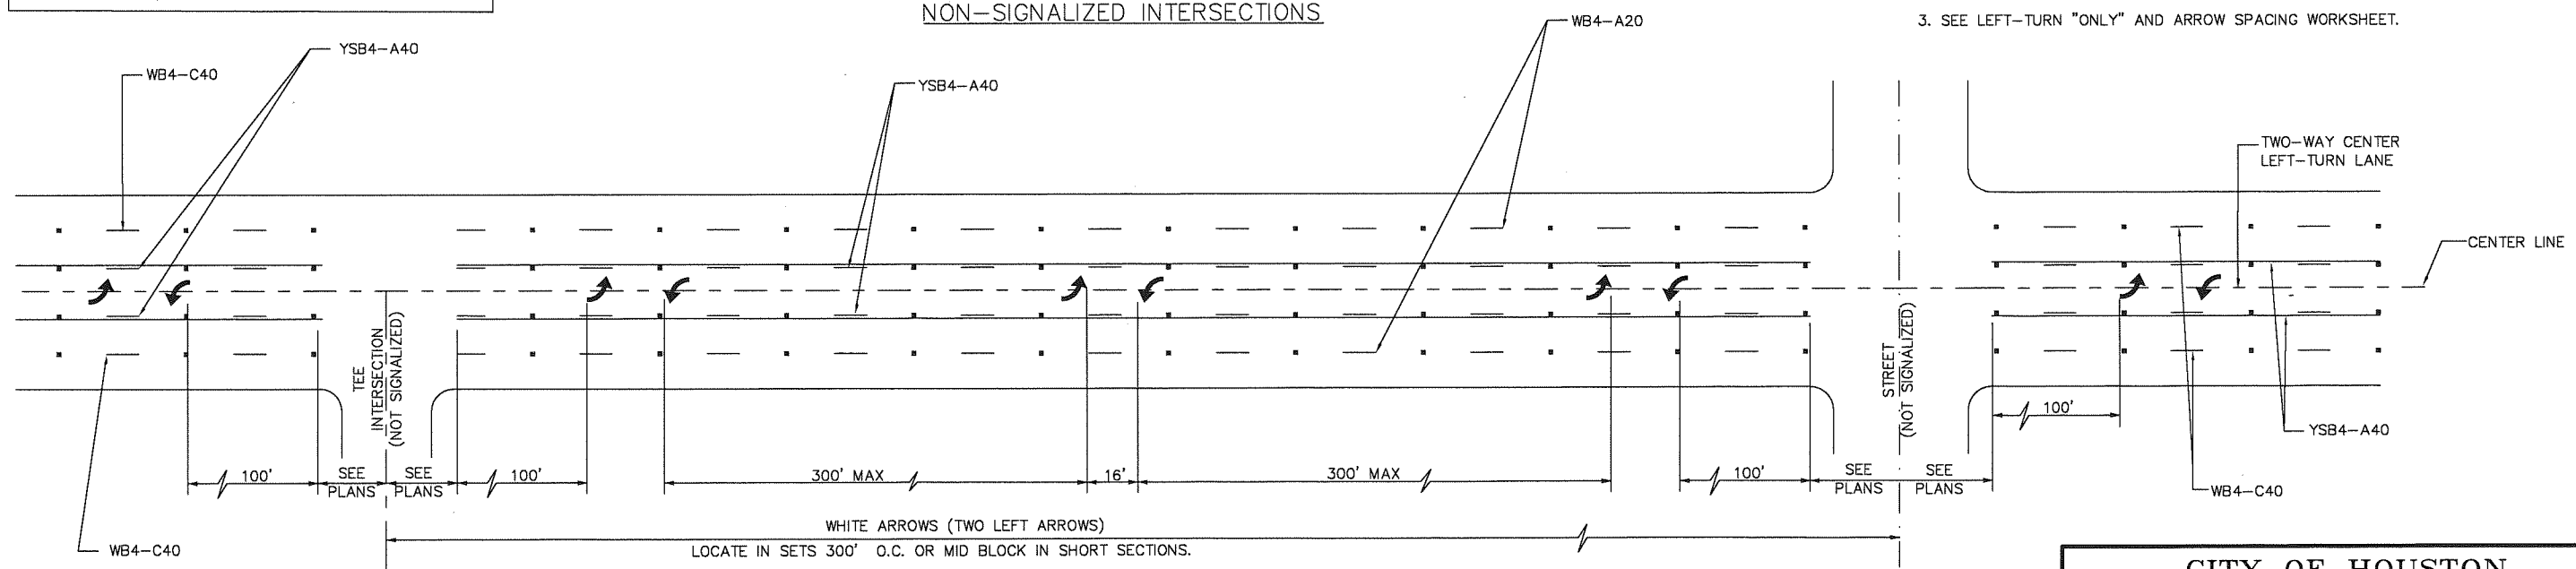

WHITE ARROWS (TWO LEFT ARROWS)  
LOCATE IN SETS 300' O.C. OR MID BLOCK IN SHORT SECTIONS.


CITY OF HOUSTON HOUSTON PUBLIC WORKS	
TWO-WAY LEFT-TURN LANE DETAIL 1 (NOT TO SCALE)	
 CITY TRAFFIC ENGINEER CITY ENGINEER	 DIRECTOR OF HOUSTON PUBLIC WORKS
EFF DATE: JUL-01-2018	DWG NO: 01510-13

# TYPICAL TWO-WAY LEFT-TURN LANE DETAILS

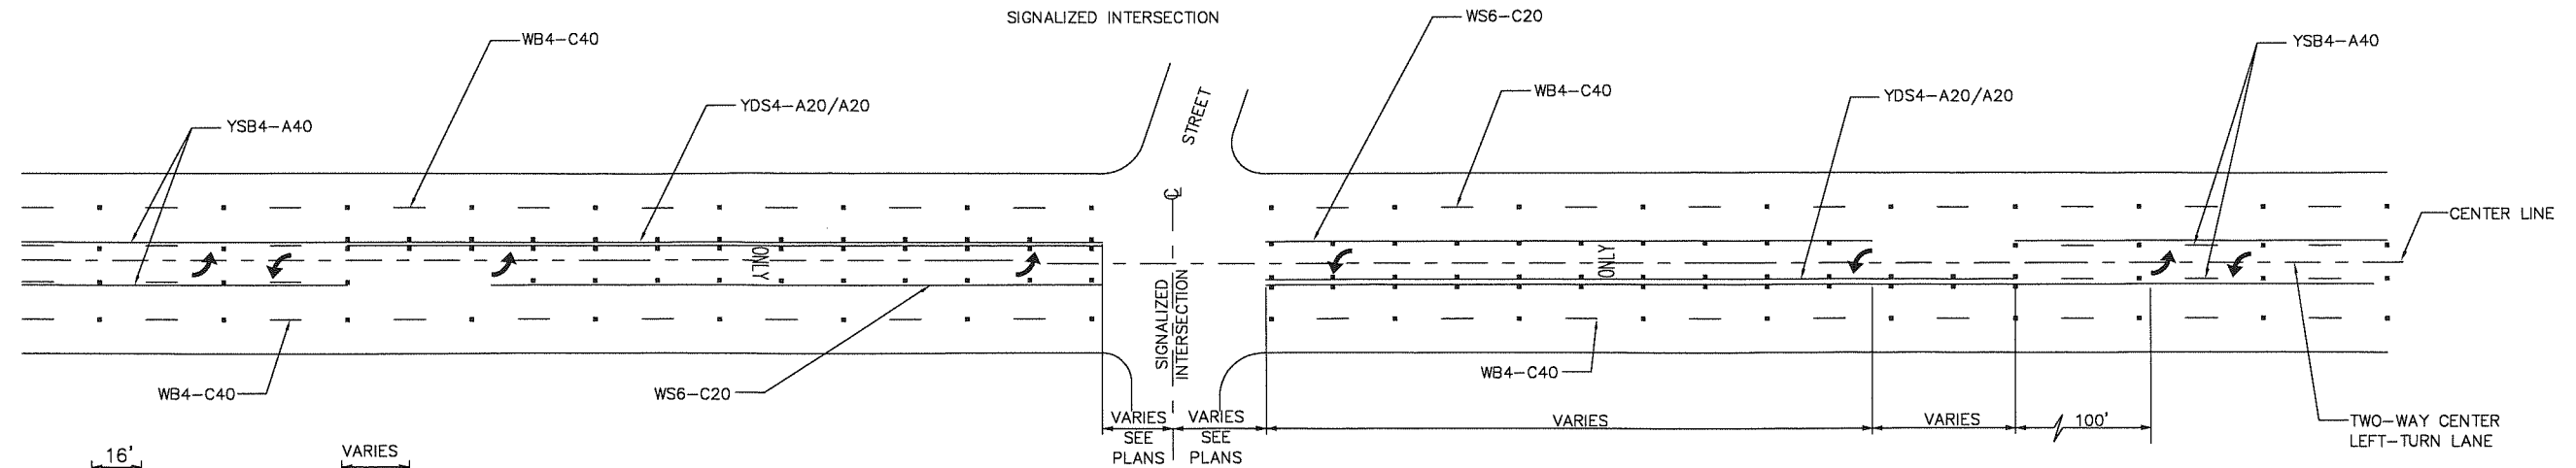


LEGEND  
TYPICAL DETAIL  
(PLACE LEGENDS IN ACCORDANCE TO  
LEFT TURN "ONLY" AND ARROW SPACING WORKSHEET)

## TYPICAL MEDIAN LEFT TURN BAY SIGNALIZED AND NON-SIGNALIZED CROSS STREETS AT BEGINNING AND END OF TWO-WAY CENTER LEFT-TURN LANE

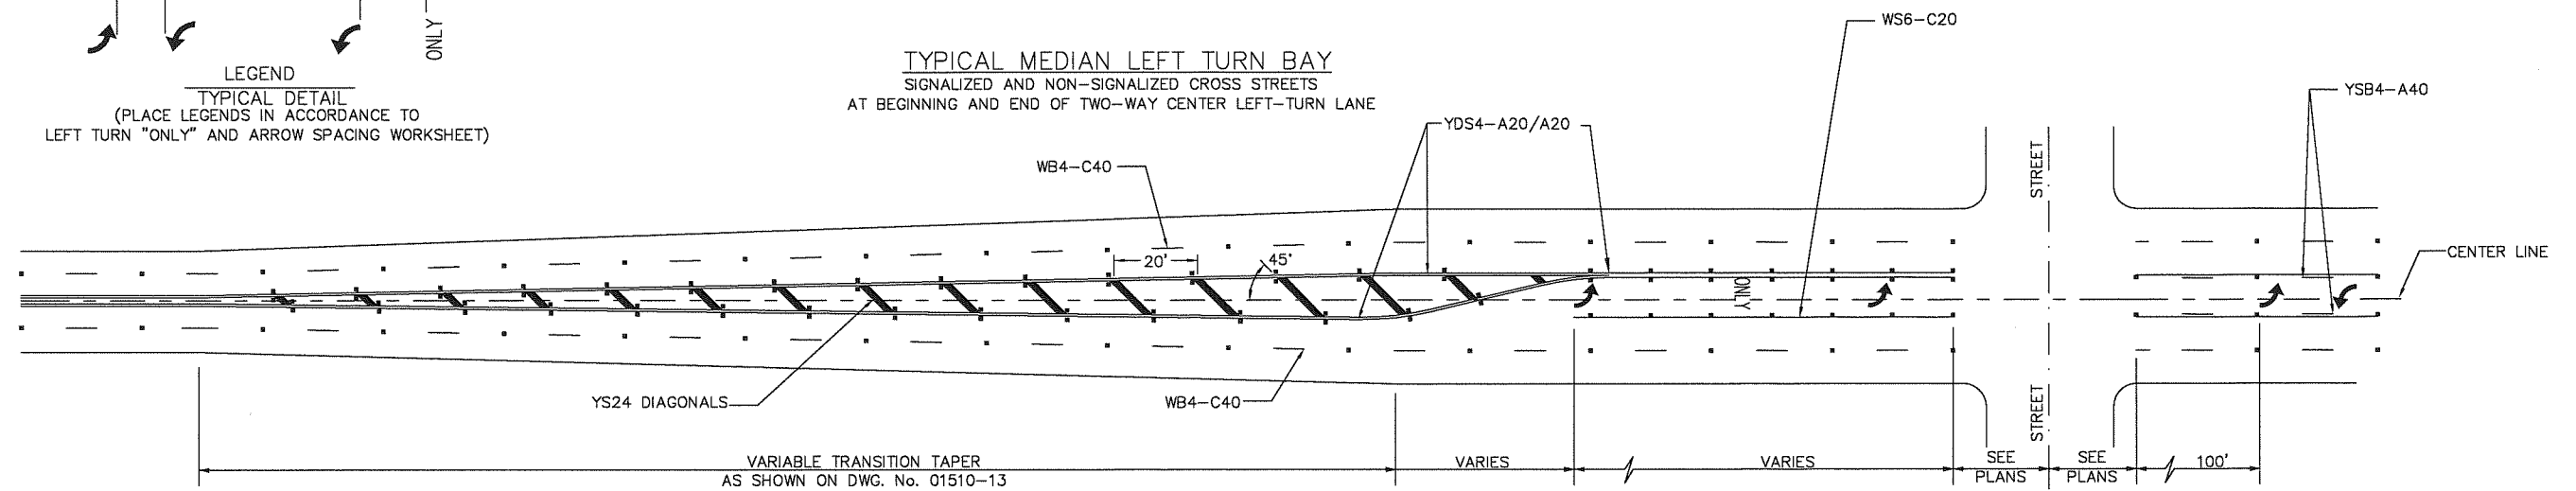

# TYPICAL TWO-WAY LEFT-TURN LANE DETAILS

SIGNALIZED TEE INTERSECTION

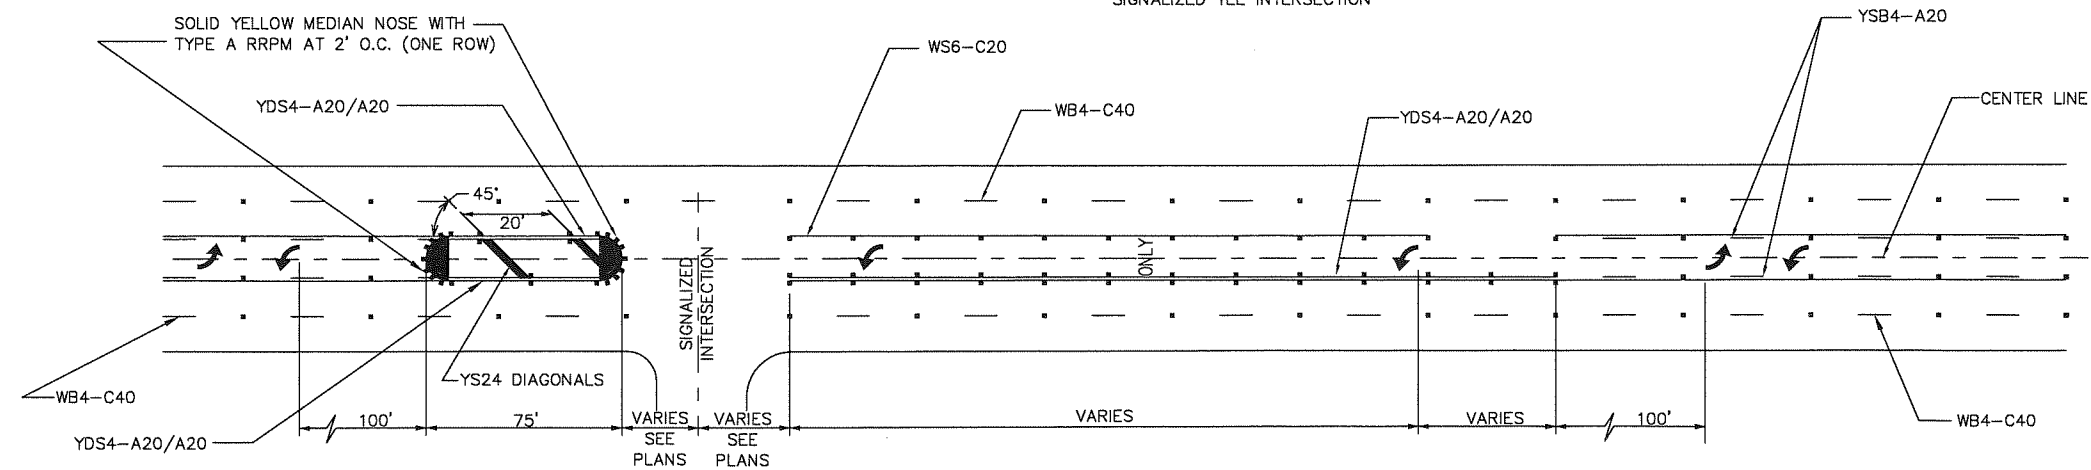

NOTE:

1. REFLECTIVE RAISED PAVEMENT MARKERS SHOULD BE IN ACCORDANCE WITH STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKERS FOR POSITION GUIDANCE AND LEFT-TURN & RIGHT-TURN LANE STANDARD PAVEMENT MARKINGS WITH REFLECTIVE RAISED PAVEMENT MARKERS.
2. SEE LEFT-TURN & RIGHT-TURN LANE DESIGN WORKSHEET FOR APPLICABLE INFORMATION.
3. SEE LEFT-TURN "ONLY" AND ARROW SPACING WORKSHEET.

CITY OF HOUSTON  
HOUSTON PUBLIC WORKS

TWO-WAY LEFT-TURN LANE  
DETAIL 2

(NOT TO SCALE)

CITY TRAFFIC ENGINEER  
CITY ENGINEER  
DIRECTOR OF  
HOUSTON PUBLIC WORKS

EFF DATE: JUL-01-2018

DWG NO: 01510-14